

Corps embrochable
Gehäuse steckbar
Plug-in body

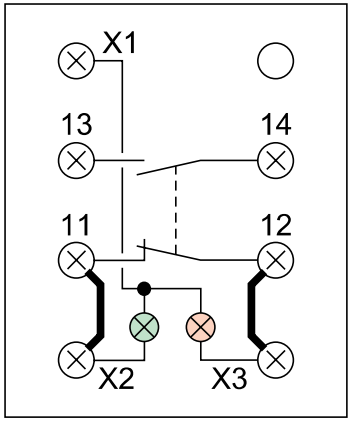


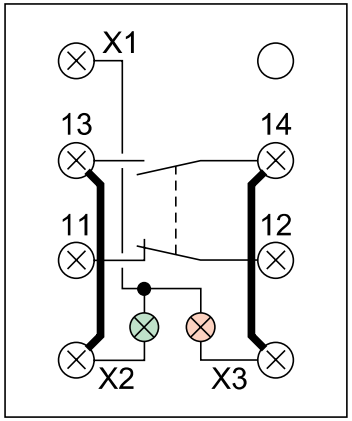


Fils internes de l'appareil
Interne Verdrahtung
Internal connections

Connections à réaliser par le client
Vom Kunden zu verdrahten
Connections to be made by the user

Version Néon
Ausführung mit Glimmlampen
Neon versions (AC)

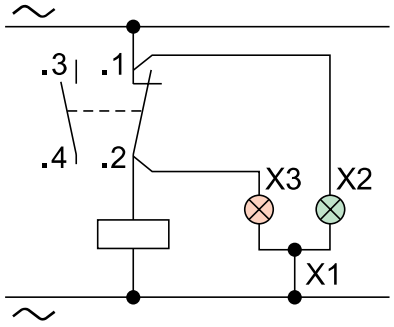


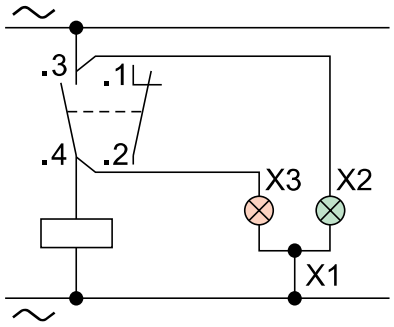

X2 : voyant vert
grüne Meldeleuchte
green light

X3 : voyant orange
orange Meldeleuchte
orange light


Version DEL / Ausführung mit LED
LED versions (AC)

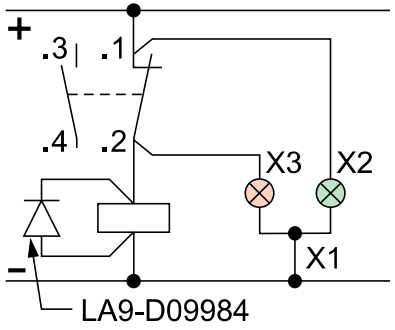


Protégé contre les inversions de fils
Schutz gegen Verpolung
Incorporating reserve polarity protection

Tenue aux surtensions : < 700V
Schutz gegen
Spitzenspannungen : < 700V
Maximum transient voltage : < 700V

Charges inductives acceptées uniquement avec un amortisseur de surtension. (LA9-D09984)
Für inductives Last Spannungsbegrenzer LA9-D09984 vorsehen
Where the load is inductive, please fit a suppressor across the load (LA9-D09984)

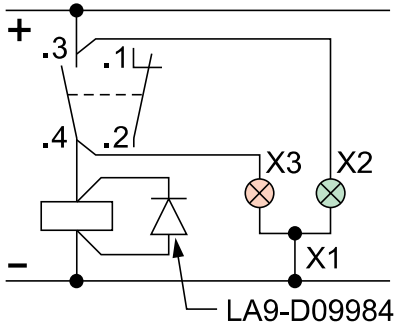

Corps fixe
Gehäuse nicht steckbar
Fixed body

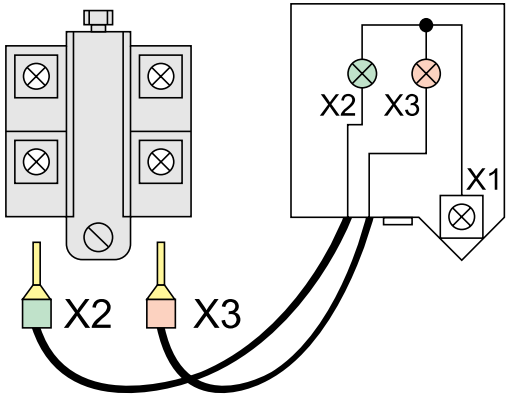

Our products should be installed, operated, serviced, and maintained only by qualified personnel. Neither TMSS France nor any of its subsidiaries or other affiliated companies shall be responsible or liable for any consequences arising out of the use of this material.

Manufacturer :
TMSS FRANCE
Tour Eqho, 2 avenue Gambetta
92400 Courbevoie – FRANCE

Telemecanique™ Sensors is a trademark of Schneider Electric Industries SAS used under license by TMSS France. Any other brands or trademarks referred to in this document are property of TMSS France or, as the case may be, of its subsidiaries or other affiliated companies. All other brands are trademarks of their respective owners.

© 2024, TMSS France, All Rights Reserved