



M18 Photo-electric sensors - Hybrid version



NPN : XUN9ANXNM12

PNP : XUN9APXNM12

IO-Link : XUN9APYNM12



NPN : XUN9ANXNL2

XUN9APXSL2*

PNP : XUN9APXNL2

XUN9ANXSL2*



Model	Sensing distance D
XUN9●●●	7m / 22,96 ft

Polarised reflex



Package Content (Example)



http://qr.tesensors.com/XU0007

Scan the code to access this Instruction Sheet and all product information in different languages or you can visit our website at:
www.telemecaniquesensors.com

We welcome your comments about this document. You can reach us through the customer support page on your local website.

* : 3 wires version = NO operation only

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before servicing equipment.
- Do not connect this device to AC power.
- The power voltage must not exceed the rated range.

Failure to follow these instructions will result in death or serious injury.


⚠ WARNING

IMPROPER SETUP OR INSTALLATION

- This equipment must only be installed and serviced by qualified personnel.
- Read, understand, and follow the compliance below, before installing the XU Photo-electric sensor.
- Do not tamper with or make alterations on the unit.
- Comply with the wiring and mounting instructions.
- Check the connections and fastening during maintenance operations.
- The proper functioning of the XU Photo-electric sensor and its operating line must be checked regularly and according to the application (for example number of operations, level of environmental pollution, etc.).


Failure to follow these instructions can result in death, serious injury, or equipment damage.

Mounting and tightening torques

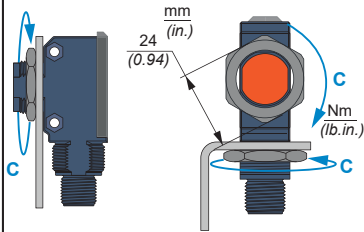

XUN9A●●●	C Max.
	1 (8.85)

Screws M3 × 18
(supplied with the bracket)
≤ 1,2 Nm
(y 10.6 lb-in)





Screws M3
(not provided)
≤ 1,2 Nm
(y 10.6 lb-in)

⚠ CAUTION

DEGREE OF PROTECTION DETERIORATION
Do not apply excessive tightening torque on the sensor during the installation process.
Failure to follow these instructions can result in injury or equipment damage.

LEDs and settings



Wiring diagrams


M12 Connector - 4 pins




Control input IN
(Pin 2 or grey wire):
(+) = NO
(-) = NC
Open = NO

2 m Cable - 4 wires


2 m Cable - 3 wires*

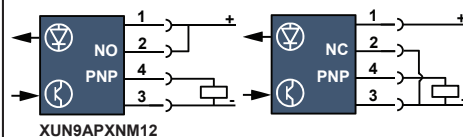

XUN9APXNM12

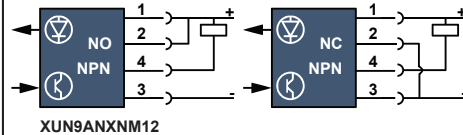


XUN9ANXNM12

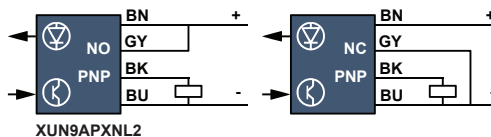

XUN9APXNL2

XUN9APXSL2*

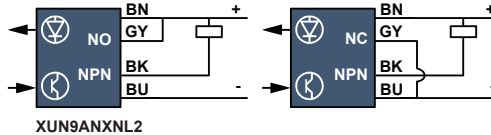


XUN9ANXNL2

XUN9ANXSL2*

* : 3 wires version = NO operation only

IO-Link



Pin	Signal	Definition
1	+	+ 24 Vdc
2	IN	+ = NO - = NC Open = NO
3	-	0 Vdc
4	Q	Switching signal (SIO)
	C	Communication IO-Link


⚠ CAUTION

INOPERABLE EQUIPMENT DUE TO CYBER ATTACK ON IO-LINK

- Apply external cybersecurity protection on IO-Link Master device.
 - Download IO-Link Description files only from these web servers:
<https://telemecaniquesensors.com/global/en/support/iolink> or
<https://ioddfinder.io-link.com/#/>
- Failure to follow these instructions can result in injury or equipment damage.



IO-Link data tables and IODD files are online : Scan the 2D code, above

Mounting, wiring and maintenance precautions



NOTICE


REDUCTION OF SERVICE LIFE
Do not pull on the sensor cable.
Failure to follow these instructions can result in equipment damage.

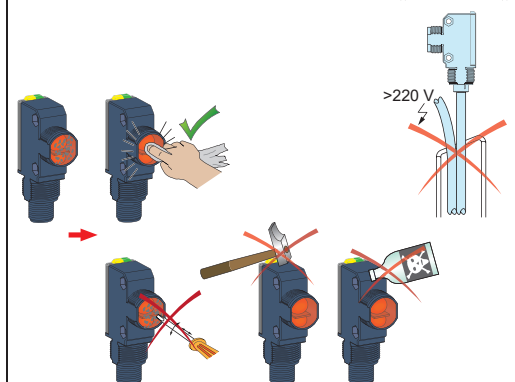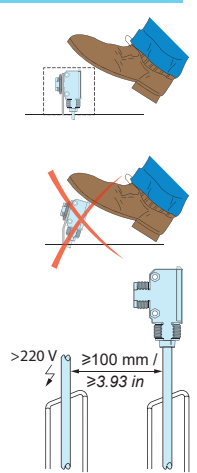


Our product should be installed, operated and maintained only by qualified personnel. Neither TMSS France nor any of its subsidiaries or other affiliated companies shall be responsible or liable for any consequences arising out of the use of this material. Telemecanique™ Sensors is a trademark of Schneider Electric Industries SAS used under license by TMSS France. Any other brands or trademarks referred to in this document are property of TMSS France or, as the case may be, of its subsidiaries or other affiliated companies. All other brands are trademarks of their respective owners.

Dimensions

XUN●A●XNL2

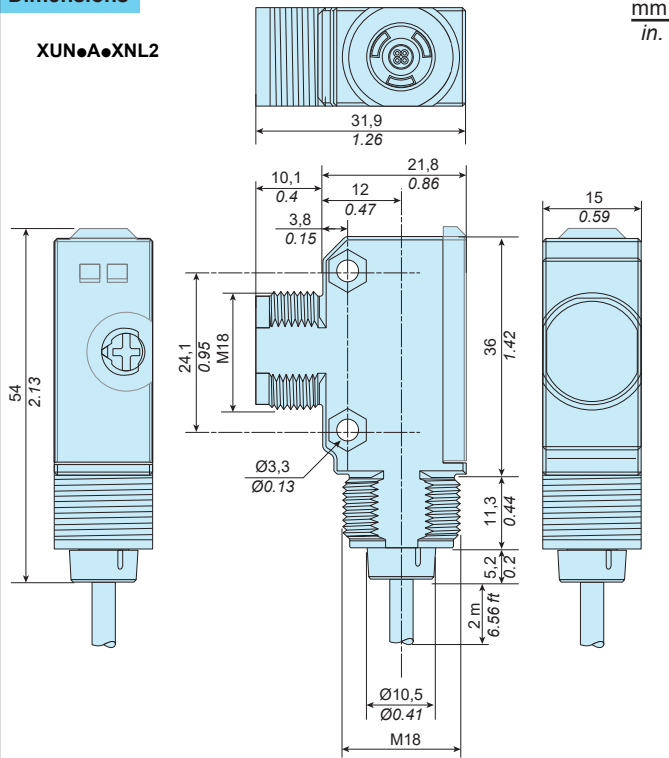
$$\frac{\text{mm}}{\text{in.}}$$

XUN●A●●NM12

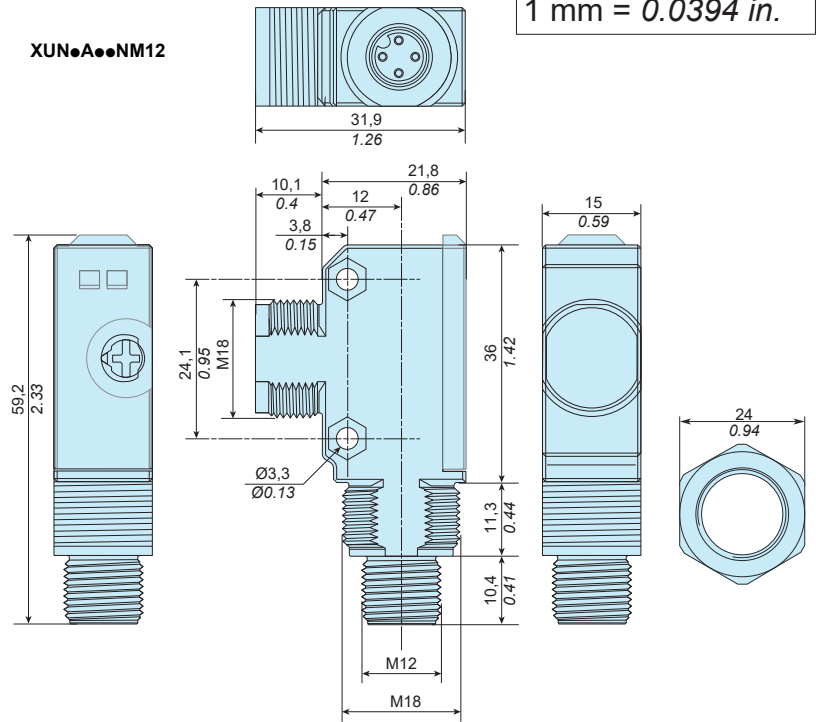


1 mm = 0.0394 in.


Accessories

Mounting brackets (to order separately)





XUZA118

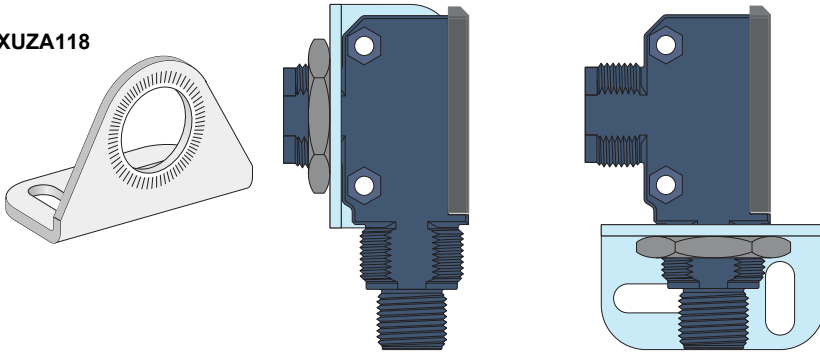

XUZASN001


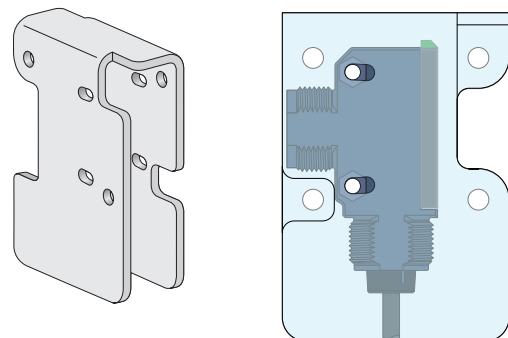


XUZASN002

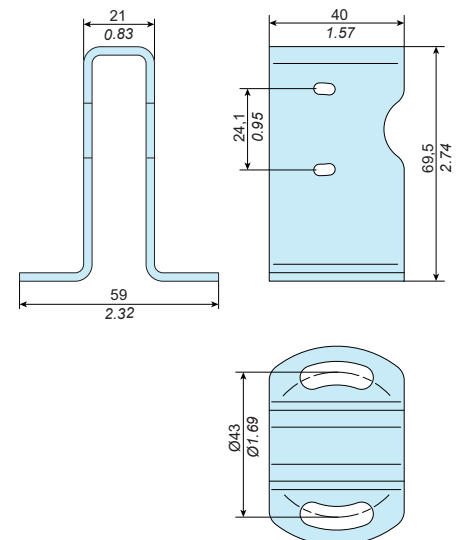
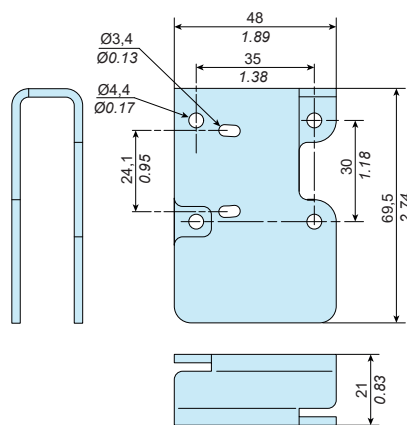
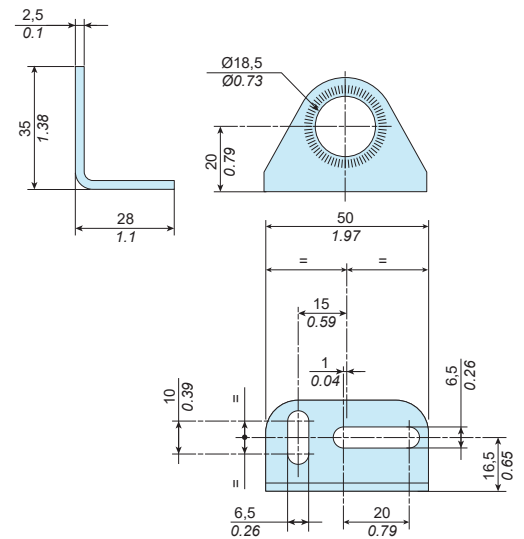
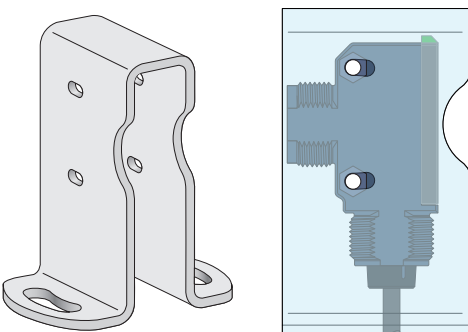


Accessories

XUZA50

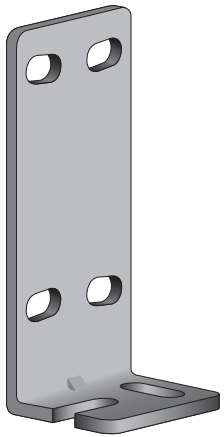


Screws M3 × 18

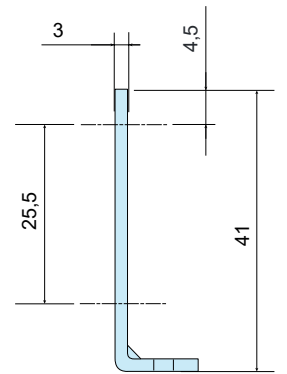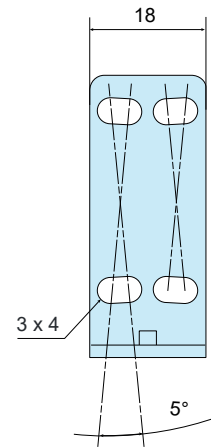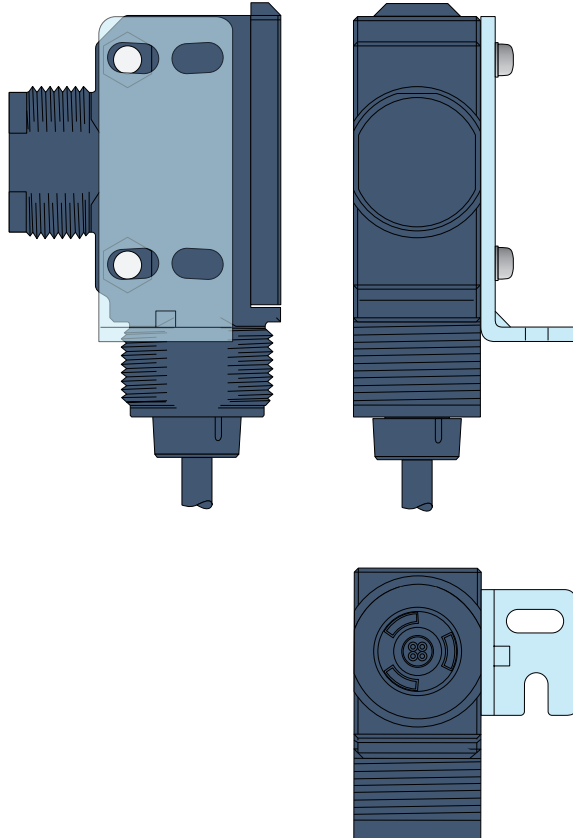


Accessories

Reflector examples (to order separately)


XUZC50




XUZC24




XUZC60S11



XUZC39




XUZC100




Reflectors Dimensions


XUZC50

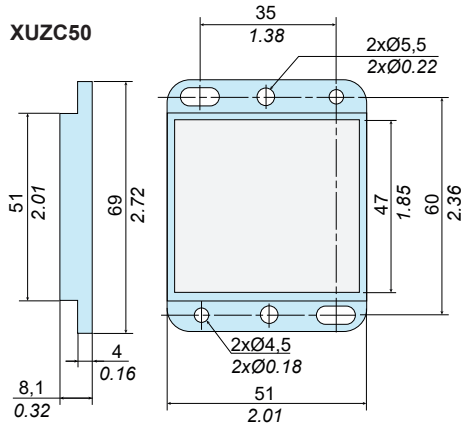


XUZC60S11

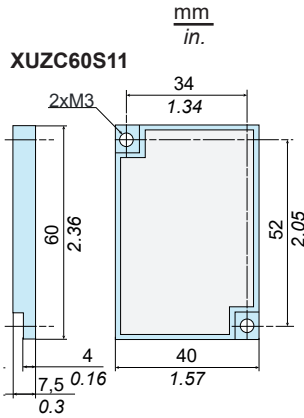


XUZC39



XUZC24

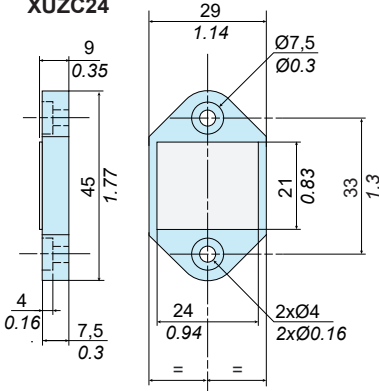

XUZC100

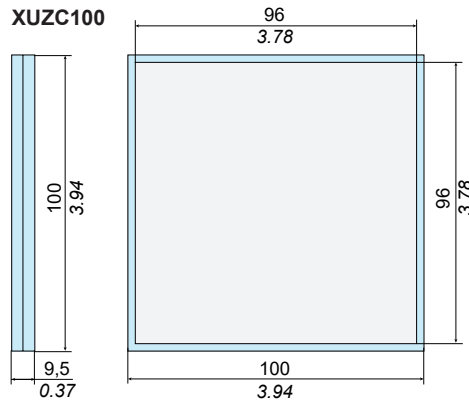


Pre-Wired connectors (examples)

PVC cable for general use
 PUR cable for severe industrial environments

M12, 4 pins					M12 - M12, 4 pins				
	PVC	PUR	PVC	PUR		PVC	PUR	PVC	PUR
Cable length					Jumper length				
2 m / 6.56 ft.	XZCPV1141L2	XZCP1141L2	XZCPV1241L2	XZCP1241L2	1 m / 3.28 ft.	XZCRV1511041C1	XZCR1511041C1	XZCRV1512041C1	XZCR1512041C1


Other cable references are available in our online catalog. Please visit our website at: www.telemecaniquesensors.com
 Or you can ask us through the customer support page on your local website.

Cable direction with angled connector

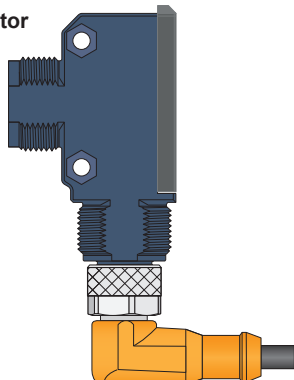


Sensor position adjustment

- Translate the sensor or object, up/down and left/right. When the setting is optimal, the Stability LED (green) is lit.
- Check sensor operation with the object and adjust the sensor, if necessary.

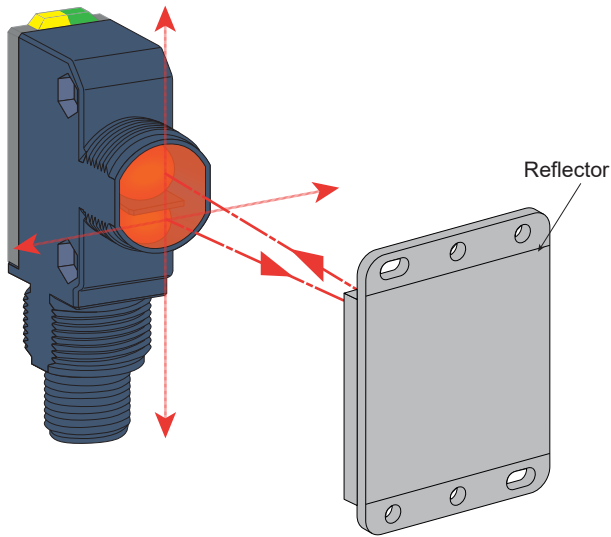


LED status with NC output function

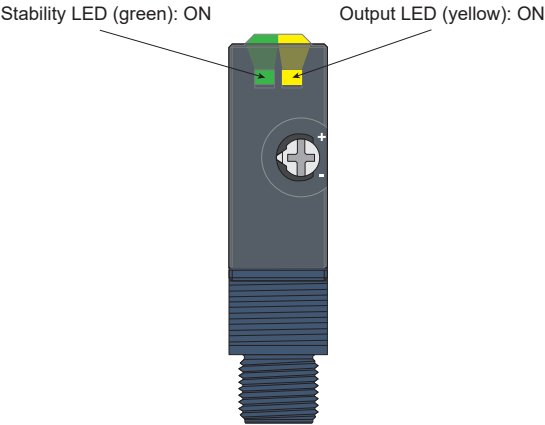





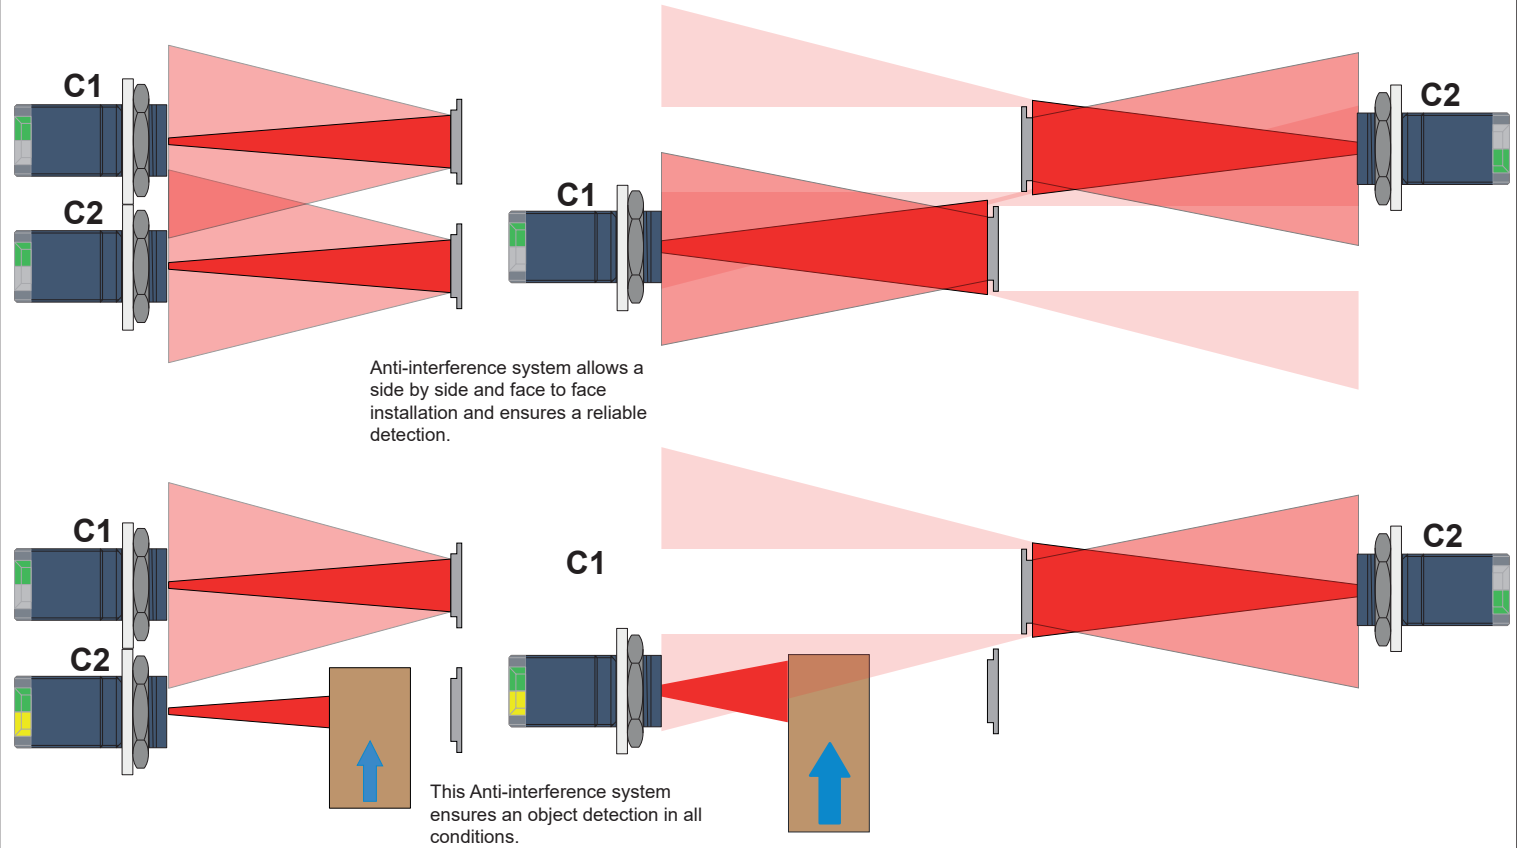




Anti-interference for side by side and face to face (only for reflex model) mounting

NO output function





Diagnostic LEDs

¹: Only for IO-Link version


	LED	LED		Description	Corrective Action
		2 Hz	3 Hz		
	Output LED (yellow)		Blinking ¹	Communication issue detected	Perform a Power Off/Power On cycle. The sensor restarts with factory settings.
			ON	Output short-circuit	Remove the short circuit
			OFF	Output overload	Verify that the load current is < 100 mA
			OFF	Undervoltage	Verify that the sensor power voltage is 12...24 Vdc
	Stability LED (green)		ON	Overtemperature	Reduce ambient temperature of the sensor or replace the sensor.
			Dim	Sensor output is ON	-
			Bright	Sensor output is OFF	-
			Bright	Inconsistent quality of detection	Check the sensor sensibility adjustment (See next page).
				Consistent quality of detection	-

Output mode setting: NO or NC (NO by default)

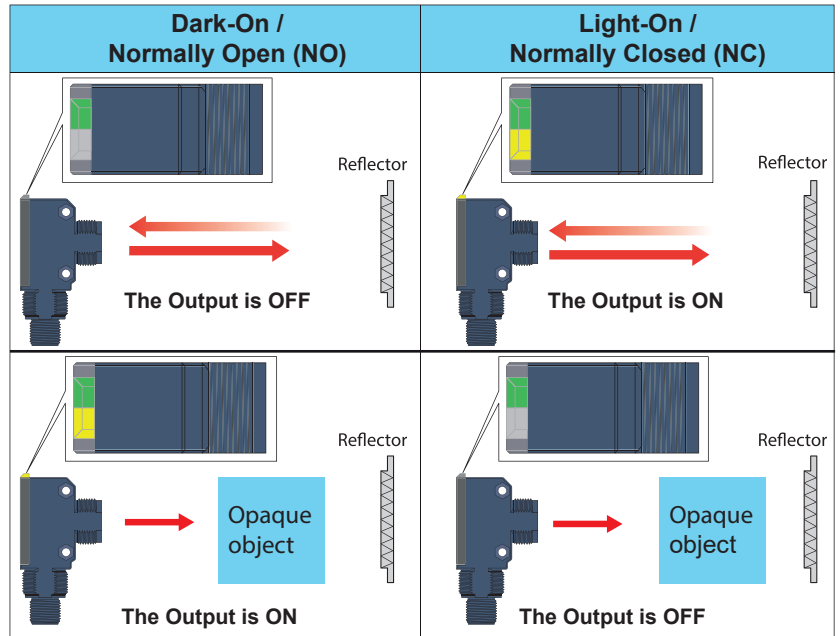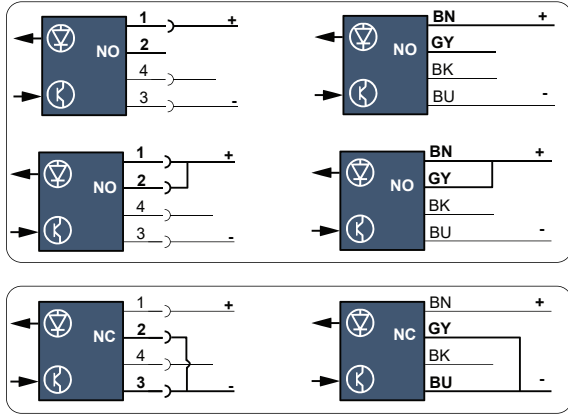

Sensor sensitivity adjustment


For accurate detection, follow the configuration below. (eg. Reflective objects, with holes or small size to obstruct the reflection of the light beam).
Note: For interference video, scan the code in the first page

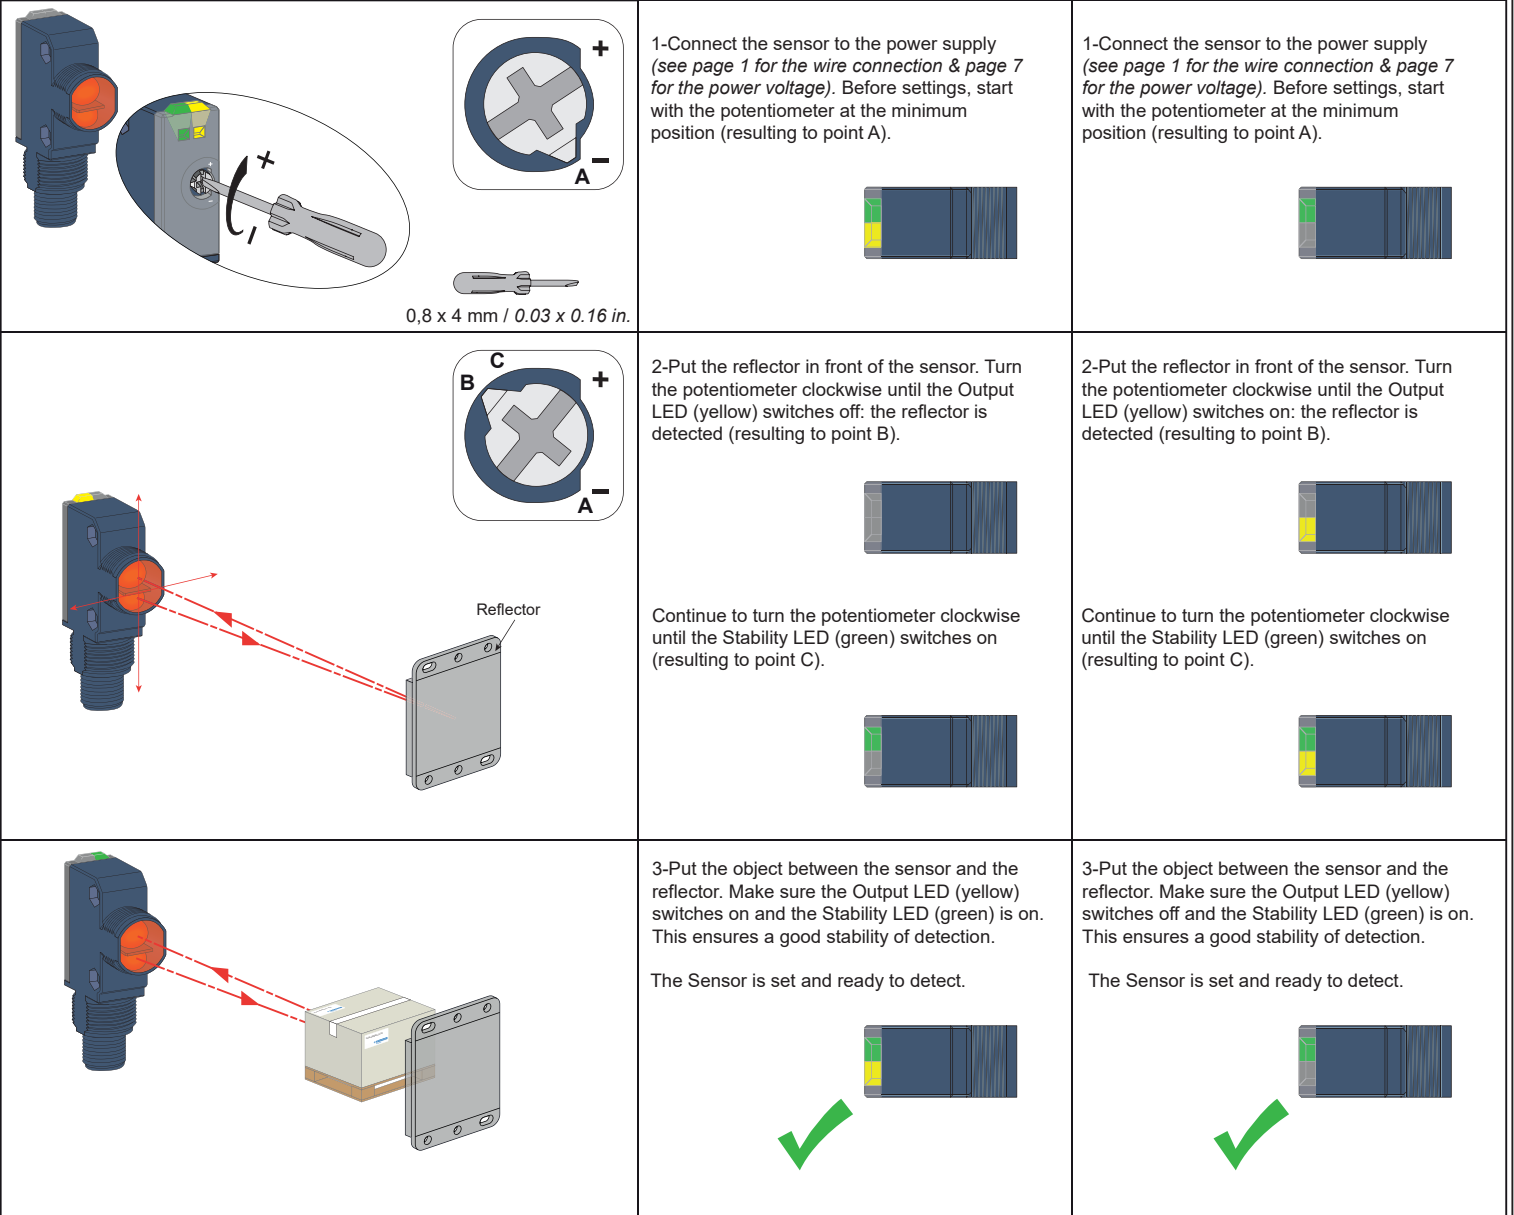


During the set up process, the output is acting as the yellow led

Detection curves

Angle - Polarized Retro-reflective XUN9

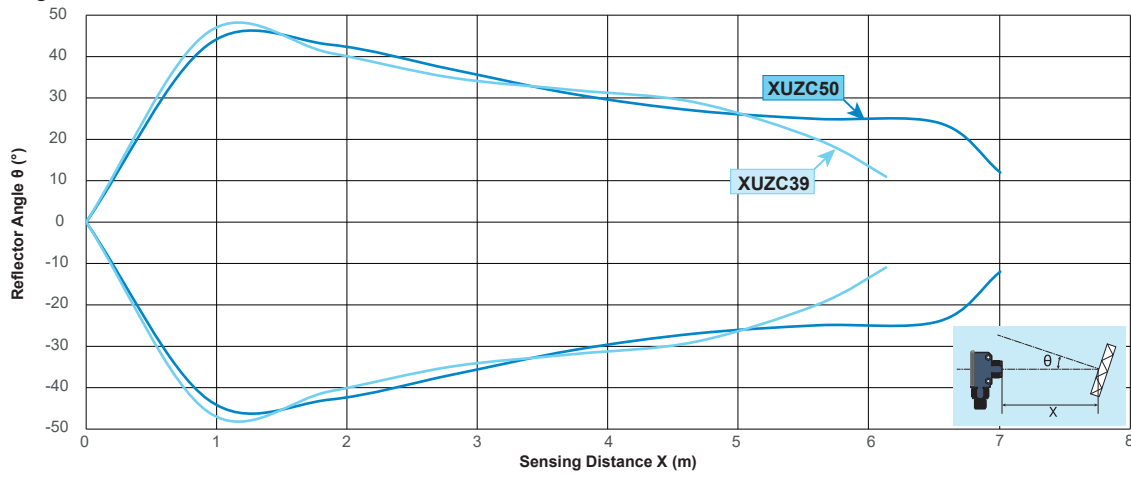


XUZC50




XUZC39



Lateral Displacement - Polarized Retro-reflective XUN9

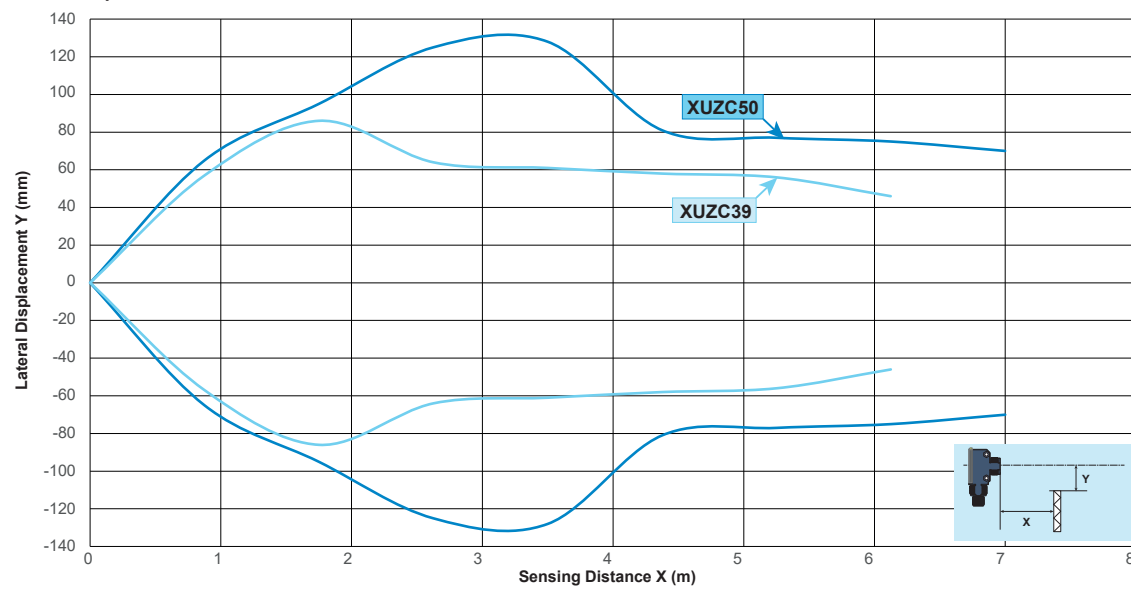


Excess Gain - Polarized Retro-reflective XUN9

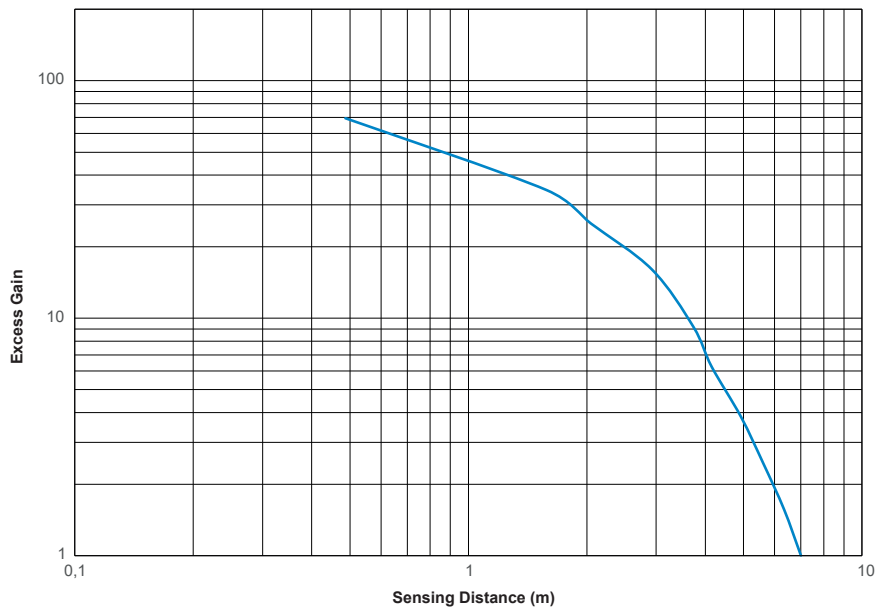

Characteristics

1 mm = 0.0394 in.

Certification	CE - UKCA - cULus
Sensing Range (using a 50 mm x 50 mm reflector XUZC50) Excess gain = 1: Maximum sensing distance	7 m - excess gain = 1 5 m - excess gain = 2
Color of detection light beam	Red
Blind zone	0 mm using a 50 mm x 50 mm reflector XUZC50 (for the reflector - no blind zone for objects)
Sensing distance setting	Potentiometer 1 turn (~ 220 degrees)
Output type	PNP / NPN or Autodetect PNP / NPN (with IO-Link)
ON Voltage drop	2 V max. (30 Vdc 100 mA)
Current consumption	< 20 mA / IO-Link: <30mA
Switching capacity	100 mA
First-up delay	< 100 ms / IO-Link < 300 ms
Response time	0,5 ms max.
Recovery time	0,5 ms max.
Switching frequency	1000 Hz (In SIO Mode for IO-Link)
Electrostatic discharge immunity	4 kV (Contact), 8 kV (Air) conforming to IEC 61000-4-2
Electromagnetic field immunity	10 V/m conforming to IEC 61000-4-3
Fast transients immunity	Burst 2 kV - 5 kHz conforming to IEC 61000-4-4
Conducted disturbances immunity	10 V conforming to IEC 61000-4-6
Radiated disturbances emissions	Class A conforming to EN 55011 / CISPR 11
Power Voltage	Rated operational voltage: 12...24 Vdc Operating range: 10...30 Vdc (including ripple p-p 10% maximum) 
Product protection	Power supply : Reverse polarity protection Output: Short circuit protection Reverse polarity protection
Light Immunity	Sunlight 40 kLx max. Incandescent light 10 kLx max.
Artificial optical radiation	Class 0 (Risk exempt) conforming to IEC 62471
Ambient Temperature	Operating : - 30...+55 °C (-22...+131 °F) Storage: - 40...+70 °C (-40...+158 °F)
Ambient Humidity	Operating : 35...95% RH Storage: 35...95% RH
Degree of protection	IP65, IP67 conforming to IEC 60529 - IP69K conforming to DIN 40050-9 (only for M12 connector version)
Vibration resistance	Frequency range: 10...55 Hz Acceleration: 7 g _n
Shock resistance	Peak acceleration: 30 g _n Duration of the pulse: 11 ms
Material	Housing: PBT/PC, Transparent cover: PMMA, Potentiometer screw: PBT Back cap (connector version): PBT/PC, Back cap (cable version): PA66 Cable: PVC (for cable version)



Manufacturer:
TMSS France
Tour Egho - 2 avenue Gambetta
92400 Courbevoie
France



UK Representative:
Yageo TMSS UK Limited
2 North Park Road
Harrogate, HG1 5PA
United Kingdom

