

Sensor Solutions for Hoisting Applications



YAGEO GROUP
Brings you



Telemecanique
Sensors

> Telemecanique Sensors

Simply easy!

Simplicity



Proximity



Expertise



Telemecanique Sensors, YAGEO Group is a world-class global brand offering a comprehensive line of products with over 25,000 types of sensors, including limit switches, pressure sensors, photoelectric sensors and proximity sensors. In addition, we provide state-of-the-art RFID systems that are compatible with many PLC manufacturers.

Telemecanique Sensors, YAGEO Group has all the right agency approvals, such as IEC, NEMA, CE, CCC, UL, CSA, and EAC.

Telemecanique Sensors, YAGEO Group is focused on three core values — Simplicity, Proximity, and Expertise. We have become experts in factory automation sensors as well as specialists in demanding applications, making our customers' lives "Simply easy!"

> Innovation focus

XUK9T photoelectric sensors offer dedicated functions for overhead cranes: **anti-collision and tandem.**

Robust detection

- Up to 70m (230 ft.) range using time-of-flight method
- Simple alignment with a reflector is achieved using a bright red laser spot

Improved operator safety


- When several cranes use the same rail, the risk of collisions or dropped load is avoided by the anti-collision function
- Monitoring the synchronization of two cranes to translate heavy or large loads is made possible with the tandem function

Easy installation and teach-in

- Compact size: 50mm x 50mm x 23mm (2" x 2" x 1")
- Teach-in button available on the device or via an external wire




> Overhead and gantry crane

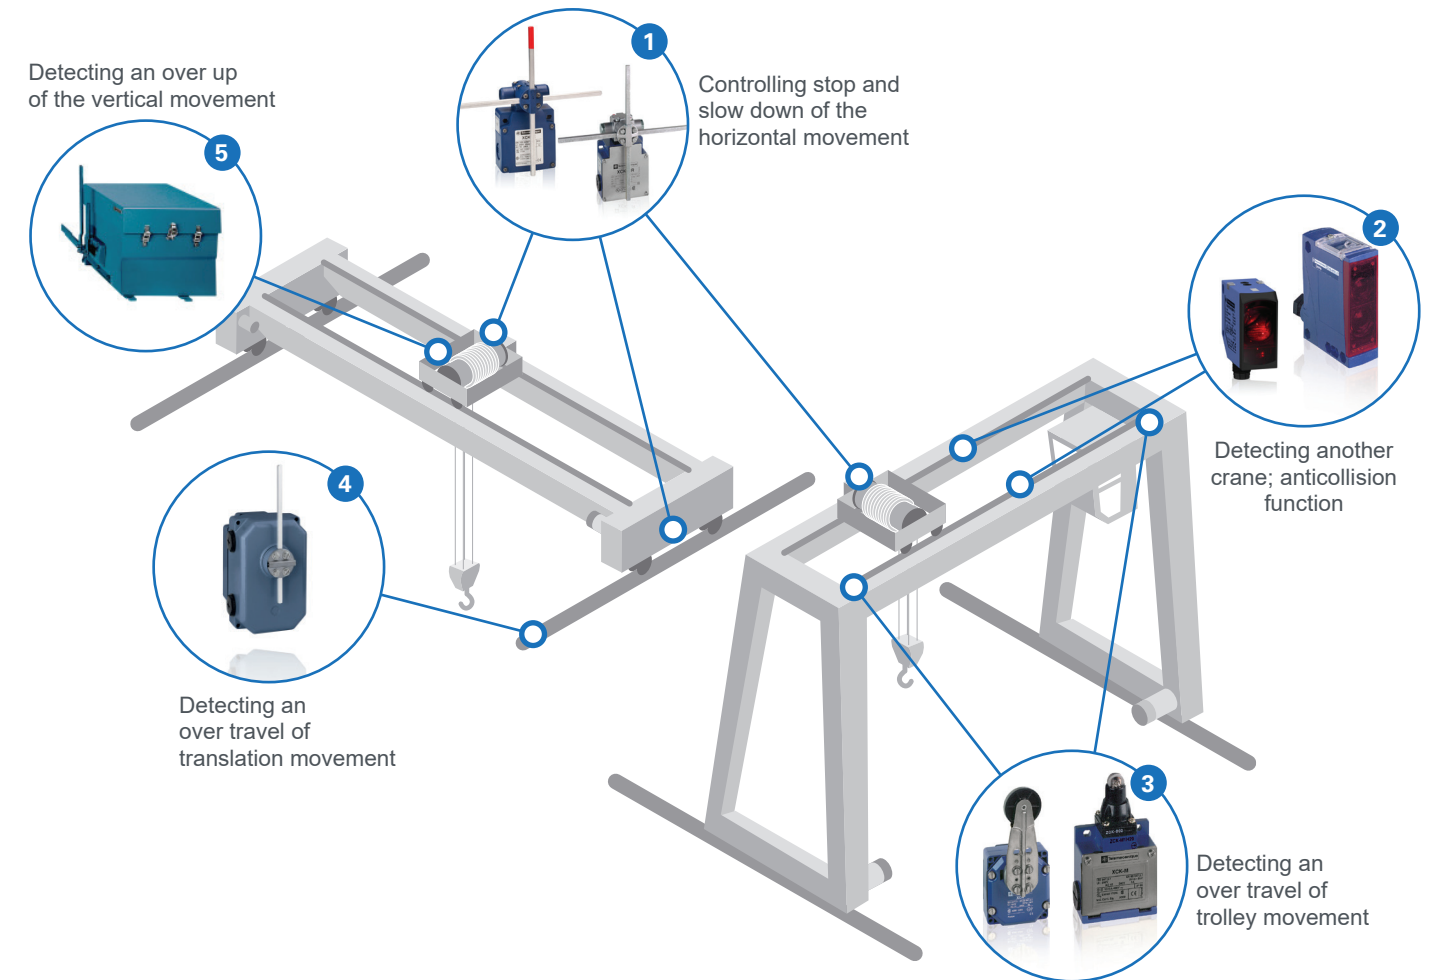

- | | | | |
|---|-----------------------------------|---|-----------------------------------|
| 1 | XCKVR / XCKMR Limit Switches | 2 ways / 2 speeds by one single sensor, compactness and robustness with positivity. | |
| 2 | XUX / XUK9T Photoelectric Sensors | Long distance detection. | |
| 3 | XCKM / XCR Limit Switches | Robustness with positivity. | |
| 4 | 5 | XF Limit Switch | The ultimate hoisting protection. |




> Mobile crane

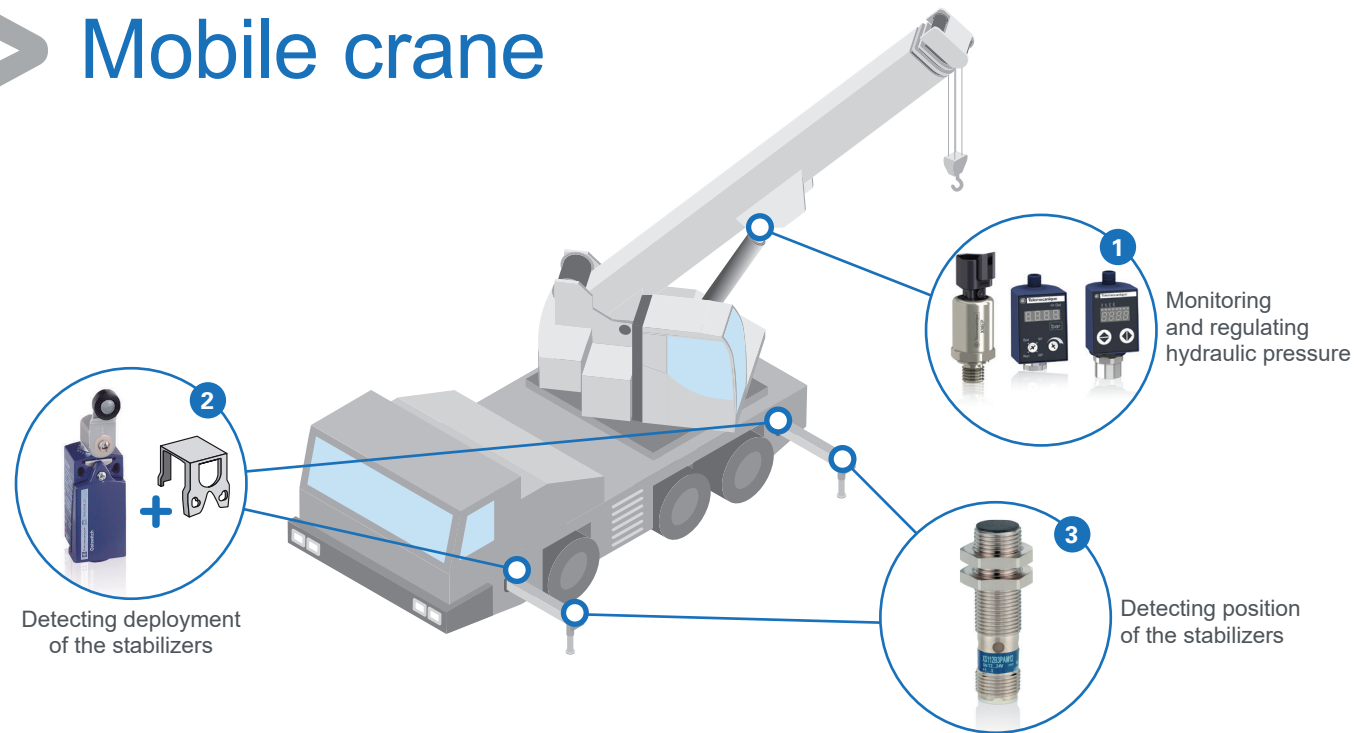

- 1 XMEP / XMLR / ZMLP Pressure Sensors / Monitor Compact and robust for reliable regulation.
- 2 XCKD Limit Switch + XCKZ05 Accessory Robust for increased resistance to impact.
- 3 XS Inductive Sensor Ease of installation and adjustable distance detection.


> Block hoist

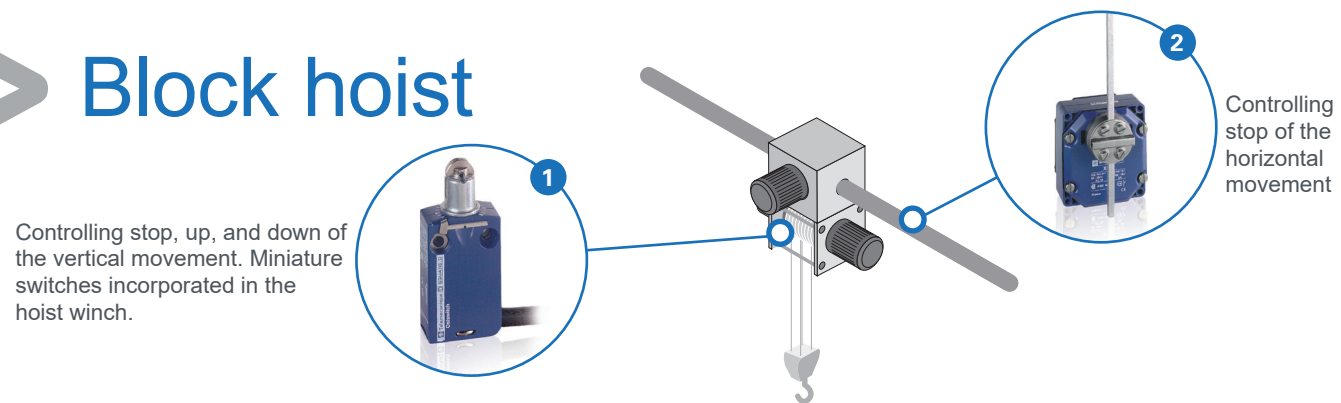

- 1 XCMD Limit Switch Compact with modular head for easy mechanical integration.
- 2 XCR Limit Switch 2 ways / 1 speed, compact and robust with positivity.




> Tower crane

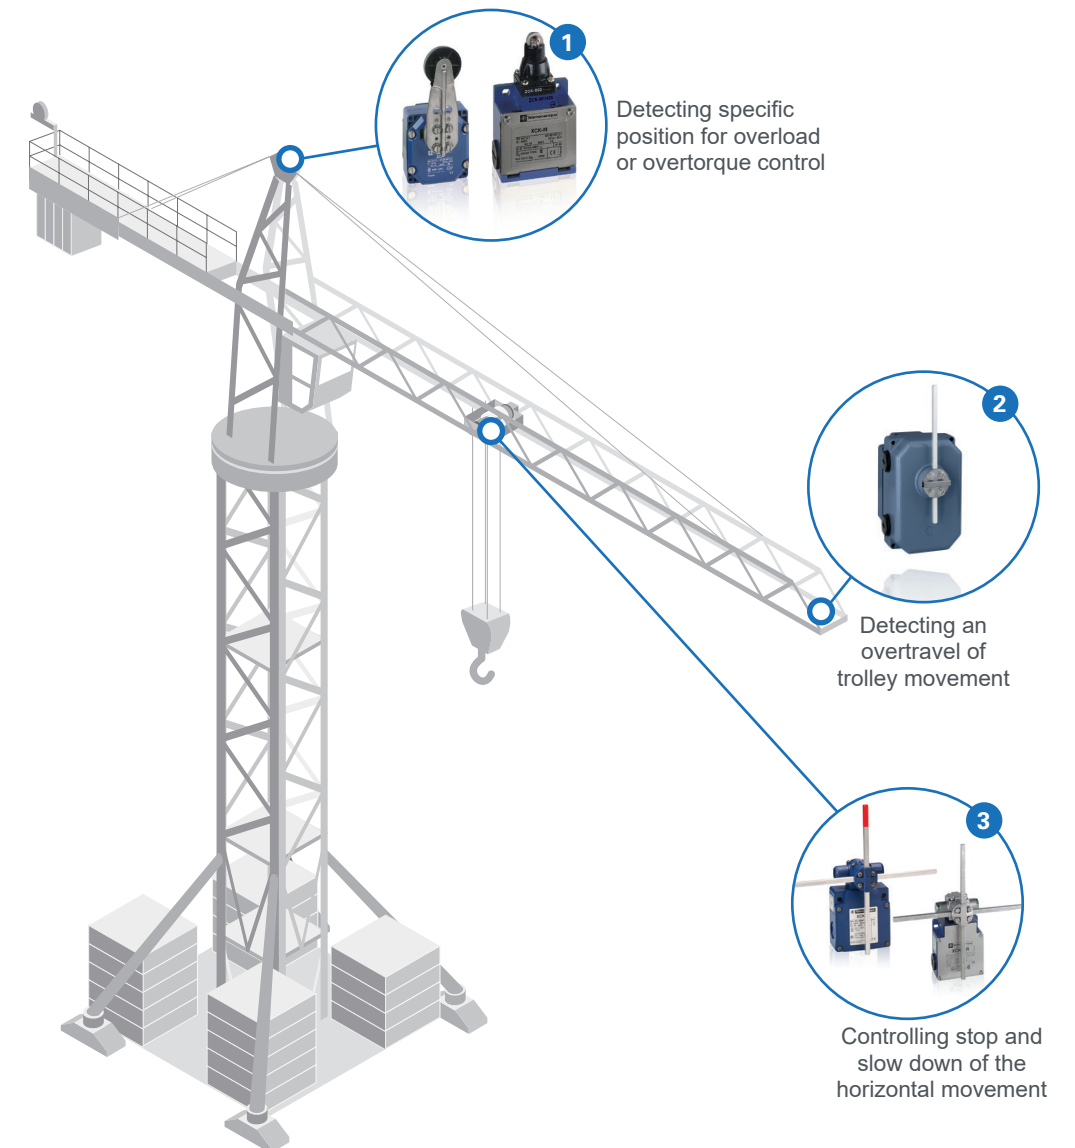

- 1 XCKM / XCR Limit Switches Robust with positivity.
- 2 XF Limit Switch The ultimate trolley protection.
- 3 XCKVR / XCKMR Limit Switches 2 ways / 2 speeds by one single sensor, compact and robust with positivity



> Harbour crane

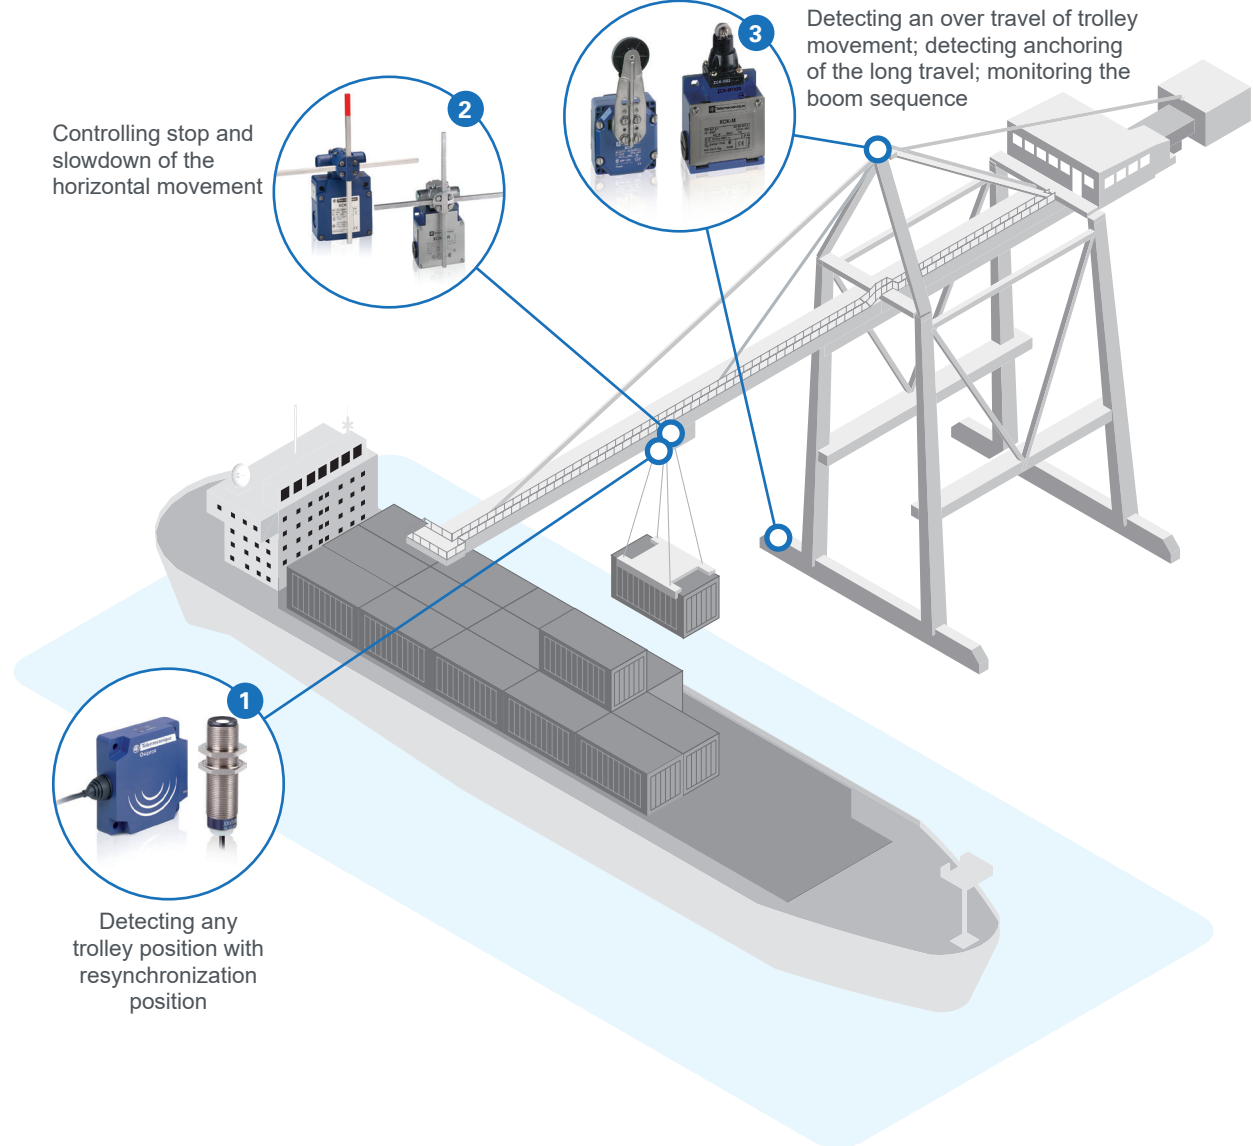

- 1

XS Inductive Sensor

Easy installation and adjustment.
- 2

XCKVR / XCKMR Limit Switches

2 ways / 2 speeds by one single sensor, compact and robust with positivity.
- 3

XCKM / XCR Limit Switches


Robust with positivity.




> Choose the best-suited product for your application

Limit switches


Limit switches




Contact	Connection				
XCKD Metal	NO+NC Snap	M16	XCKD2110P16	XCKD2102P16	XCKD2118P16
		Pg11	XCKD2110G11	XCKD2102G11	XCKD2118G11




Contact	Connection				
XCMD Metal	NO+NC Snap	cable	XCMD2110L1	XCMD2102L1	XCMD2115L1
	NO+NC Slow		XCMD2510L1	XCMD2502L1	XCMD2515L1



Contact	Connection					
XCKM	NO+NC Snap	M20	XCKM110H29	XCKM102H29	XCKM115H29	XCKM121H29
		Pg13	XCKM110	XCKM102	XCKM115	XCKM121




Contact	Connection		
XF9D	4 poles, 25A	Pg21	XF9D251
	4 poles, 65A	Pg29	XF9D651




Contact	Connection	
XF9F	3 poles, 115A	Pg36
	3 poles, 185A	
	3 poles, 265A	



* reset knob : replace the last 1 by 2 in the reference



Contact	Connection		
XCKVR Plastic	"By Pass"	M20x1.5	XCKVR24SR1H29
	"Single Speed"		XCKVR44D1H29
	"Double Speed"		XCKVR54SR1H29



Contact	Connection		
XCKMR Metal	"By Pass"	M20x1.5	XCKMR24SR1H29
	"Single Speed"		XCKMR44D1H29
	"Double Speed"		XCKMR54D1H29
	"Double Speed"	Pg13.5	XCKMR54D1





Contact	Connection		
XCRA	NO+NC Snap	Pg13.5	XCRA11 XCRA15






Photoelectric sensors

XU							
Sensing distance		11 m	70 m	Recommended Reflector		Recommended Cable	
AC/DC	Relay	Terminals	XUX9ARCTN16	XUZC100		XZCP29P12L10	
24 V	PNP	M12 - 5 pins	XUX9APANM12	XUZC250		XZCP29P12L10	
		M12 - 8 pins	XUK9TAH2MM12	XUZC250		XZCP29P12L10	

Inductive sensors

							
			Ø 12 mm	Ø 18 mm	15x32x8 mm	26x26x13 mm	40x40x15 mm
XS	Sensing distance		4 mm	8 mm	5 mm	10 mm	15 mm
DC 3 wires NO	PNP	cable	XS112B3PAL2	XS118B3PAL2	XS7F1A1PAL2	XS7E1A1PAL2	XS7C1A1PAL2
		connector	XS112B3PAM12	XS118B3PAM12	XS7F1A1PAL01M8	XS7E1A1PAM8	XS7C1A1PAM8
	NPN	cable	XS112B3NAL2	XS118B3NAL2	XS7F1A1NAL2	XS7E1A1NAL2	XS7C1A1NAL2
		connector	XS112B3NAM12	XS118B3NAM12	XS7F1A1NAL01M8	XS7E1A1NAM8	XS7C1A1NAM8
DC 4 wires NO+NC	PNP	connector	XS112B3PCM12	XS118B3PCM12			

Pressure sensors

XMEP	Connector	Analogue output	0...60 bar	0...100 bar	0...250 bar	0...400 bar	0...600 bar	 Display for XMEP PNP 2 switching outputs ZMLPA2P0SH PNP Analogue 4...20mA + 1 swithing output ZMLPA2P0SH	
	M12	0,5-4, 5V	XMEP060BD11F	XMEP100BD11F	XMEP250BD11F	XMEP400BD11F	XMEP600BD11F		
		4-20mA	XMEP060BD21F	XMEP100BD21F	XMEP250BD21F	XMEP400BD21F	XMEP600BD21F		
		0-10V	XMEP060BD71F	XMEP100BD71F	XMEP250BD71F	XMEP400BD71F	XMEP600BD71F		
	Deutsch DT04-3P	0,5-4, 5V	XMEP060BT11F	XMEP100BT11F	XMEP250BT11F	XMEP400BT11F	XMEP600BT11F		
		4-20mA	XMEP060BT21F	XMEP100BT21F	XMEP250BT21F	XMEP400BT21F	XMEP600BT21F		
		0-10V	XMEP060BT71F	XMEP100BT71F	XMEP250BT71F	XMEP400BT71F	XMEP600BT71F		
	AMP Superseal 1,5 3-pin	0,5-4, 5V	XMEP060BV11F	XMEP100BV11F	XMEP250BV11F	XMEP400BV11F	XMEP600BV11F		
		4-20mA	XMEP060BV21F	XMEP100BV21F	XMEP250BV21F	XMEP400BV21F	XMEP600BV21F		
		0-10V	XMEP060BV71F	XMEP100BV71F	XMEP250BV71F	XMEP400BV71F	XMEP600BV71F		
XMLR	Outputs		0...100 bar	0...160 bar	0...250 bar	0...400 bar	0...600 bar		
	2 switching outputs		XMLR100M2P05	XMLR160M2P05	XMLR250M2P05	XMLR400M2P05	XMLR600M2P05		
	Analogue 4...20mA + 1 switching output		XMLR100M1P05	XMLR160M1P05	XMLR250M1P05	XMLR400M1P05	XMLR600M1P05		

Discover our complete range of sensors, visit us on www.tesensors.com

TMSS France

SAS au capital de 301 931 214 €
Tour Eqho
2 Avenue Gambetta
92400 Courbevoie
908 125 255 RCS de Nanterre

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. As standards, specifications and design change from time to time, please ask for confirmation of the information given in this publication. Neither TMSS France nor any of its subsidiaries or other affiliated companies shall be responsible or liable for misuse of the information contained in this document.

Telemecanique™ Sensors is a trademark of Schneider Electric Industries SAS used under license by TMSS France. Any other brands or trademarks referred to in this document are property of TMSS France or, as the case may be, of its subsidiaries or other affiliated companies. All other brands are trademarks of their respective owners.