

Sensor Solutions for Water pumping Applications



Telemecanique™

Sensors

Simply easy!

> Telemecanique Sensors

Simply easy!

Simplicity



Proximity



Expertise



Telemecanique Sensors is a world-class global brand offering a comprehensive line of products with over 25,000 types of sensors, including limit switches, pressure sensors, photoelectric sensors and proximity sensors. In addition, we provide state-of-the-art RFID systems that are compatible with many PLC manufacturers.

Telemecanique Sensors has all the right agency approvals, such as UL, IEC, NEMA, CE, CCC, UL, CSA, and EAC.

Telemecanique Sensors is focused on three core values — Simplicity, Proximity, and Expertise. We have become experts in factory automation sensors as well as specialists in demanding applications, making our customers' lives "Simply easy!"

> Innovation focus



Telemecanique Sensors is committed to providing solutions for virtually any pressure monitoring situation. If the location of your pressure switch is easily accessible, our XMLR model pressure switch comes with an easy-to-read monitoring interface. If the location of your pressure switch is hidden from view, you can use our XMLP pressure switch and connect it to our ZMLP remote pressure switch monitor mounted in a more convenient, easily-accessible location.

Easy to install

XMLR is one of the most compact pressure switches on the market and requires minimum installation time. The body of the switch, after being mounting on the fluid entry, can be conveniently rotated. The display can also be reversed to ensure easy reading from any position.


Easy to set up

The ergonomic design of the XMLR sets the new standard for configuration ease; the intuitive menu can be navigated easily using only two pushbuttons.

Easy to maintain

At each power on, all segments of the XMLR display briefly light up. This allows the operator to quickly confirm that each part of the display is operating correctly.

> Irrigation

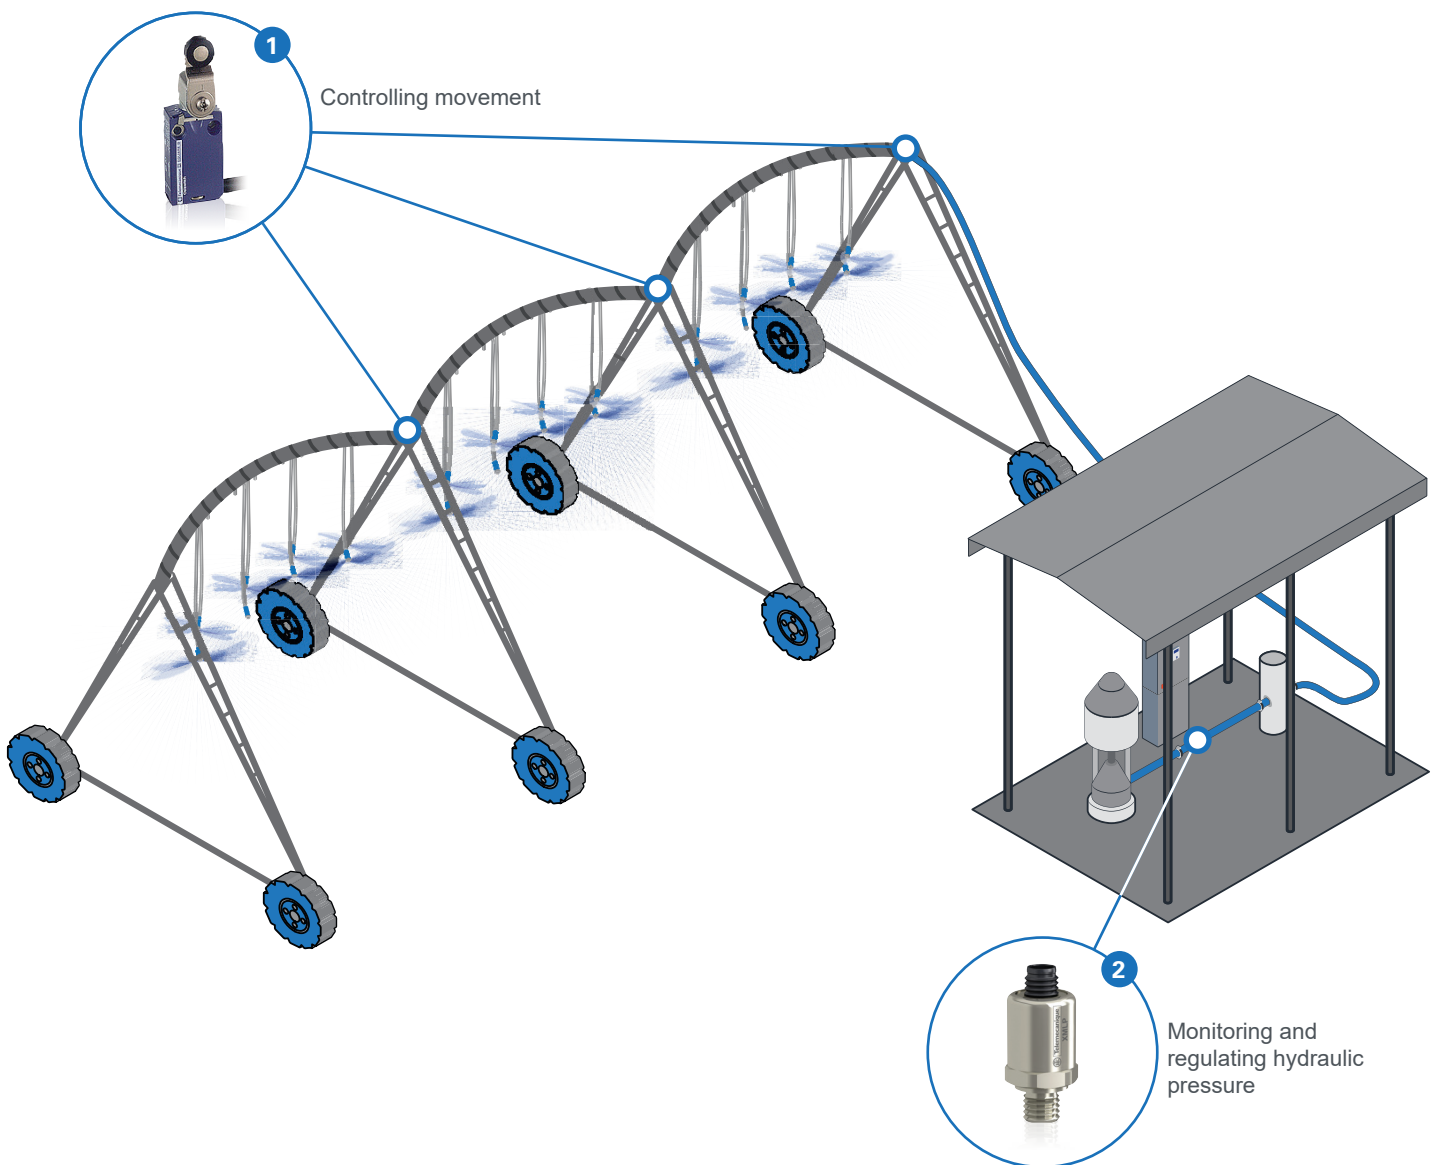

1 XCMD Limit Switch


The most compact Limit Switch body on the market with integrated connectors.

2 XMLP Pressure Sensor

Compact and robust for reliable operation.



> Fire truck

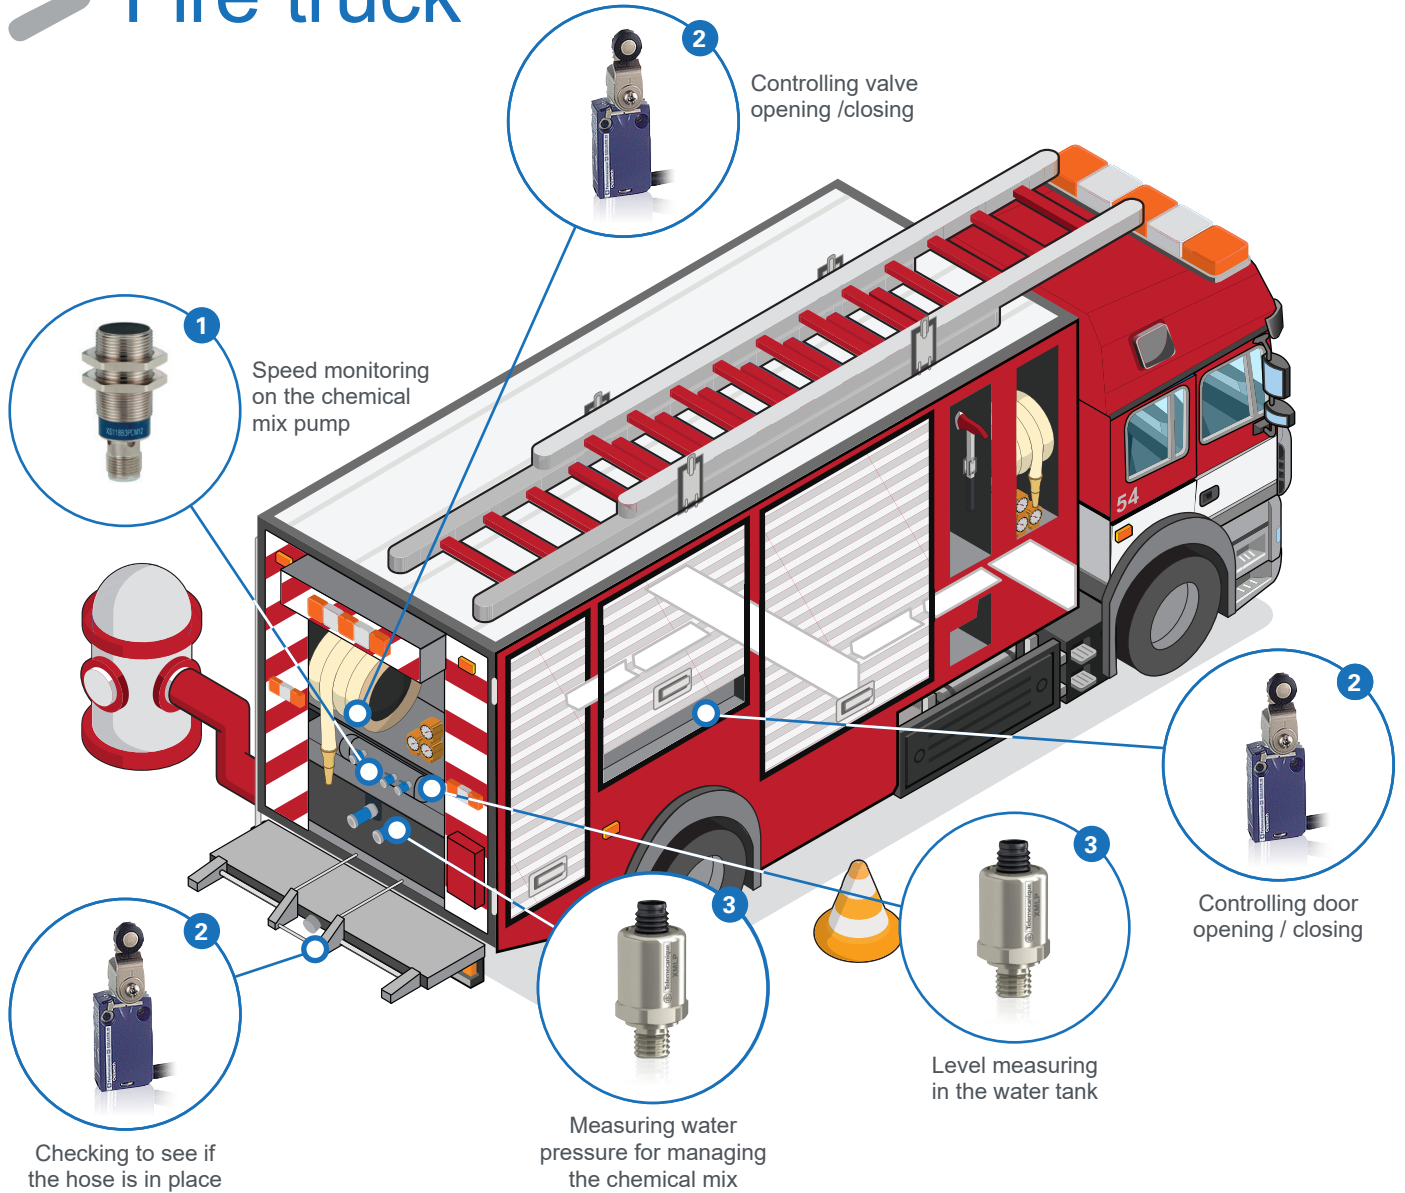

1 XS Inductive Sensor

Inductive sensor designed for mobile equipment.

2 XCMD Limit Switch


The most compact Limit Switch body on the market with integrated connectors.

3 XMLP Pressure Sensor

Compact and robust for reliable operation.



> Lifting and boosting station

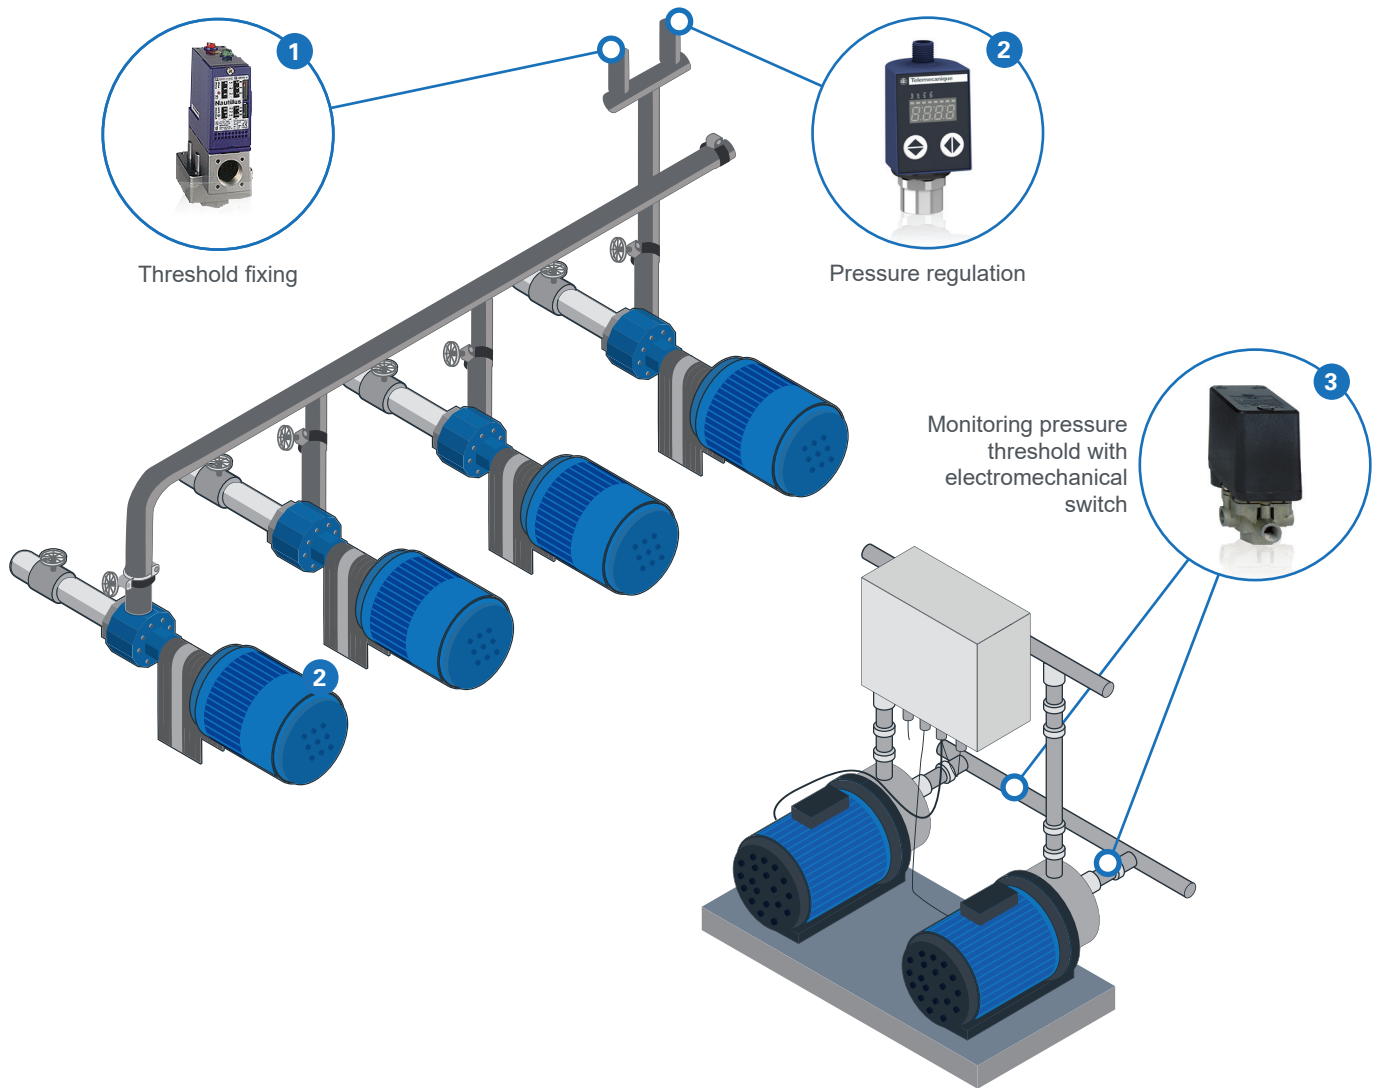


1 | XMLA or XMX Pressure Sensor | XMX for simple regulation between two thresholds; XMLA designed for harsh environments.

2 | XMLR Pressure Switch | Easy, two-button configuration.

3 | XMP Pressure Sensor | Direct power switching up to 3 kw.



> Water storage facilities

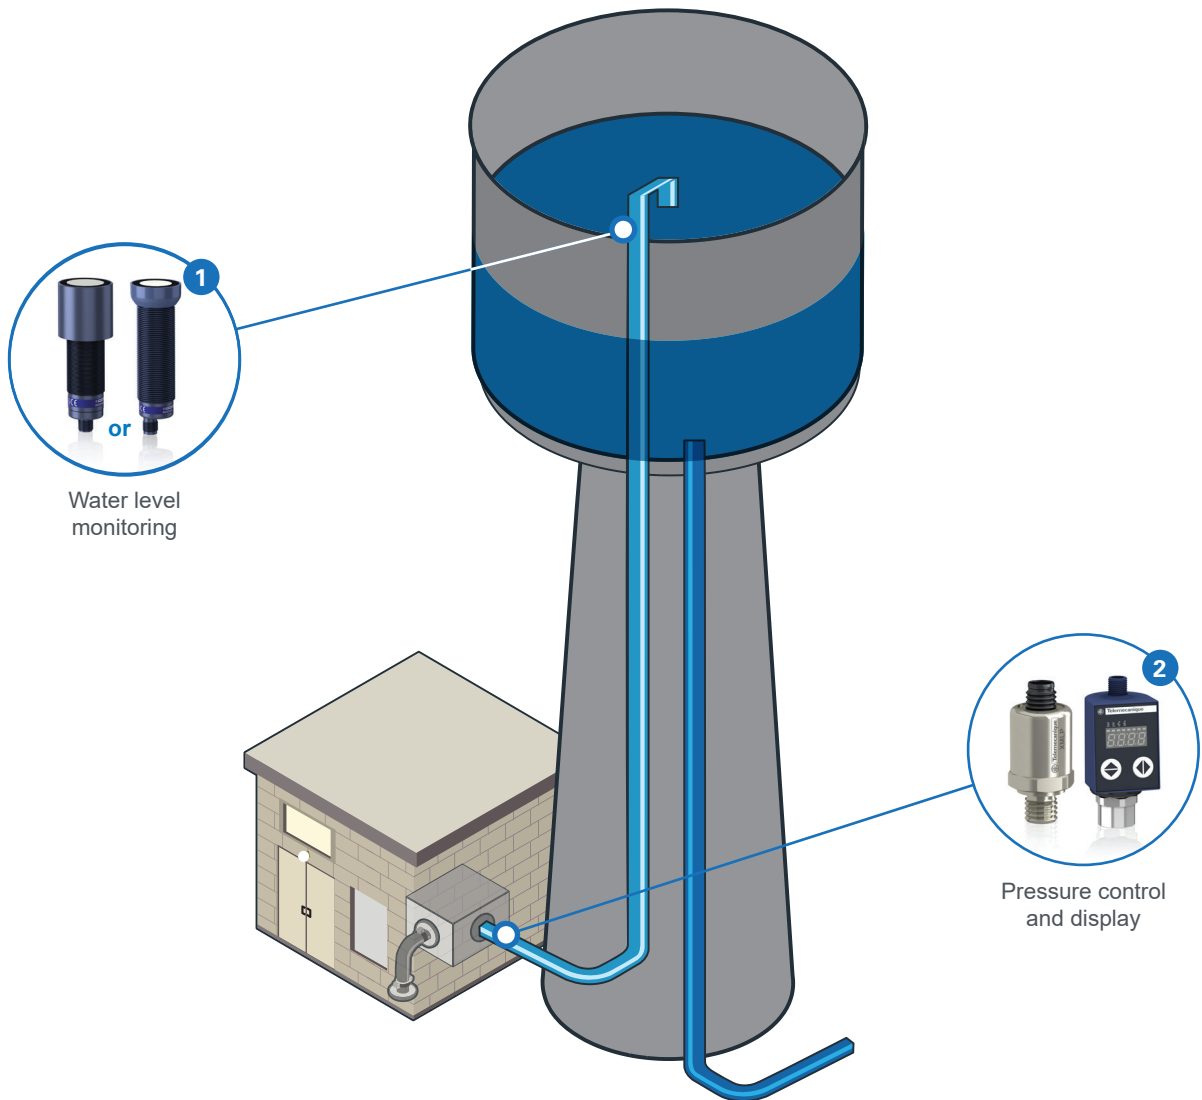


1 XXS30 / XXA30 Ultrasonic Sensor

Long distance level monitoring with ultrasonic technology.

2 XMLP Pressure Sensor + ZMLP Monitor


Easy reading and adjustment of water pressure.

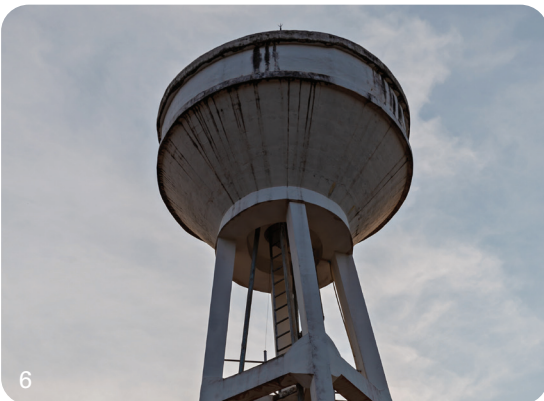

6



> Access control

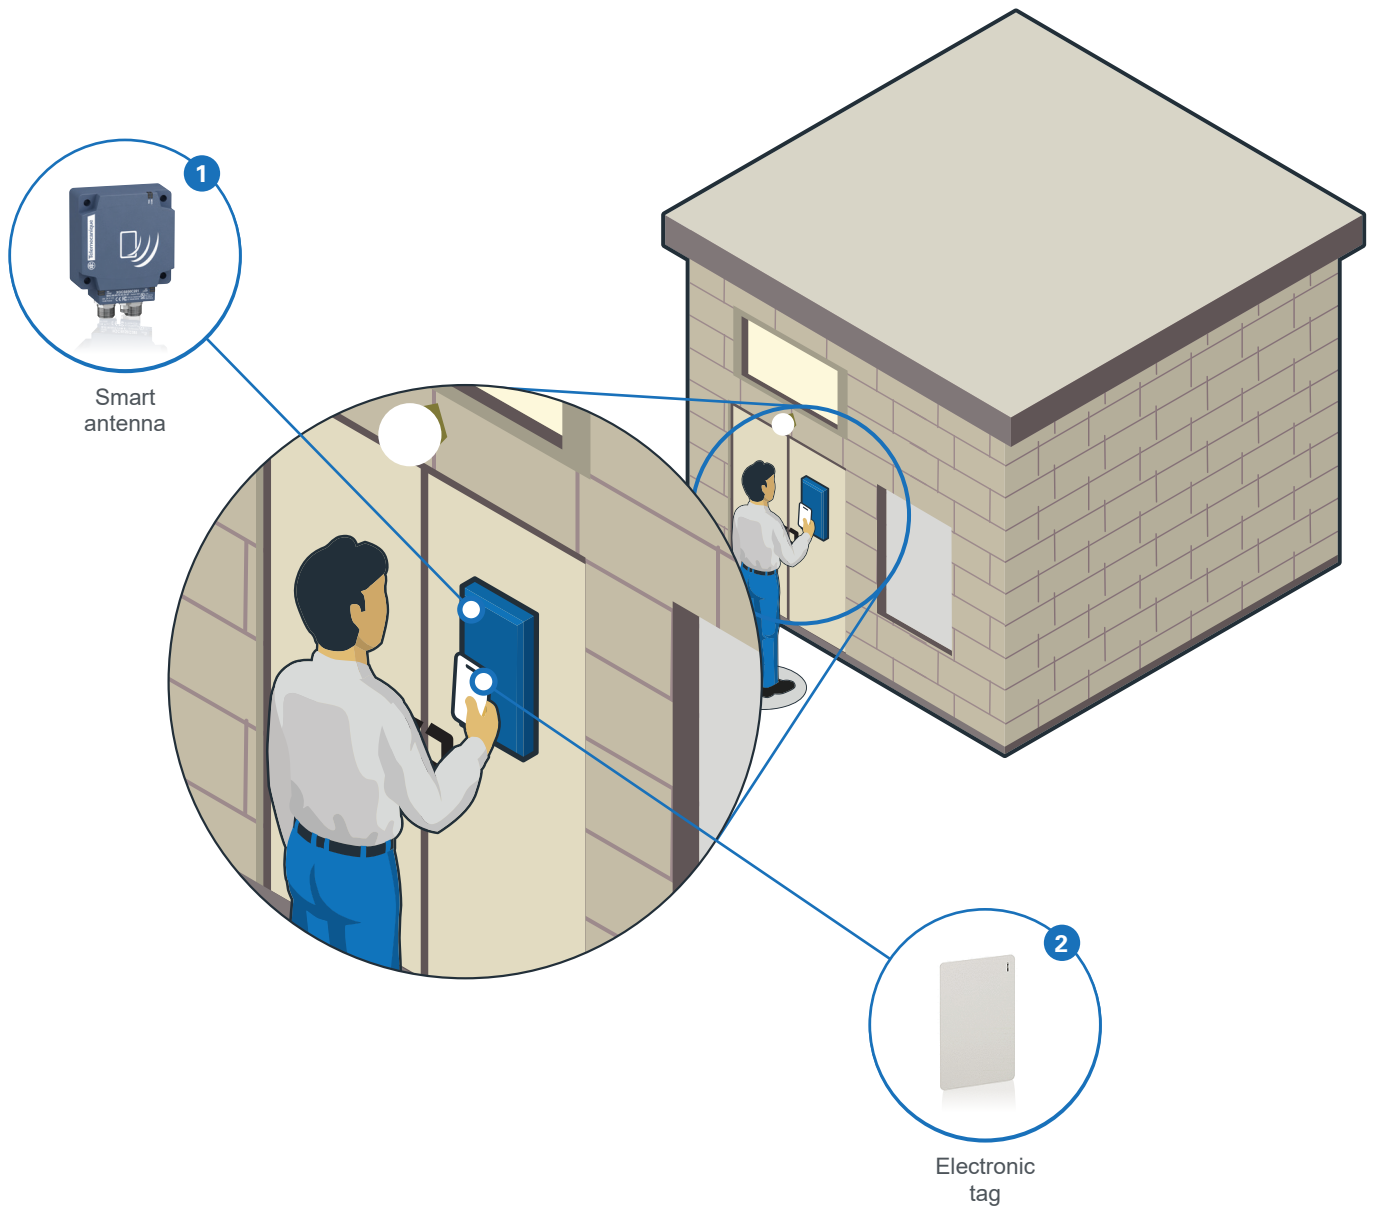

1 XGCS RFID Reader Robust for outdoor environments.

2 XGHB Electronic Tag Enhanced security through traceability.



> Choose product best-suited for your application


Ultrasonic sensors

XX M30	Functions	Output	Nominal sensing distance Sn			
			1m	2m	4m	8m
	Pumping mode	PNP (NO/NC programmable)	XXS30P1PM12	XXS30P2PM12	XXS30P4PM12	
		2xPNP (NO/NC programmable)				XXS30P8PPM12
Analog		0...10 V	XXS30P1VM12	XXS30P2VM12	XXS30P4VM12	XXS30P8VPM12
		4...20 mA	XXS30P1AM12	XXS30P2AM12	XXS30P4AM12	XXS30P8APM12

Limit switches

XCMD	Output type		Complete switch with steel plunger	Complete switch with steel roller lever
			Cable 1m	2-pole NC+NO snap action
	Cable 1m	2-pole NC+NO slow break	XCMD2502L1	XCMD2516L1
	M12 / 5 Pins	2-pole NC+NO snap action	XCMD2102M12	

Inductive proximity sensors

XS	3 wire	PNP - connector M12	Short body	Long body
				

Pressure sensors

XM / ZM	Power circuit	Control circuit	4 bar	6 bar	10 bar	12 bar	16 bar	25 bar
			2-pole 2 NC	XMPA06B2131		XMPA12B2131		
	3-pole 3NC		XMPA06C2131		XMPA12C2131			
	1 contact c/o		XMXA06L2135		XMXA12L2135		XMXA25L2135	
	1 contact c/o		XMLA004A2S12		XMLA010A2S12			
	2 switching output (PNP)				XMLR010G2P05		XMLR016G2P05	XMLR025G2P05
	1 switching output (PNP) + 1 analog output (0-10 V)				XMLR010G1P75		XMLR016G1P75	XMLR025G1P75
	1 analog output (0-10 V)		XMLP004GD71F	XMLP006GD71F	XMLP010BD71F		XMLP016BD71F	XMLP025BD71F
	1 analog output (4-20mA)		XMLP004GD21F	XMLP006GD21F	XMLP010BD21F		XMLP016BD21F	XMLP025BD21F
	Switch and display for XMLP (for 4-20 mA only)							
		2 switching output (PNP)			ZMLPA2P0SH			
		1 switching output (PNP) + 1 analog output (4-20 mA)			ZMLPA1P2SH			

RFID access control

XG	Smart antenna	Communication	Dimensions	
		Ethernet	80 x 93 x 40 mm	XGCS850C201
		Modbus	40 x 40 x 15 mm	XGCS49LB201
	Electronic tag	Shape	Dimensions	
		Badge	54 x 85.5 x 1 mm	XGHB90E340

Discover our complete offer: www.telemecaniquesensors.com or contact your local sales agency

TMSS France SAS

Share capital: 366 931 214 euros
 2 Avenue Gambetta - Tour Eqho
 92400 Courbevoie
 908 125 255 RCS de Nanterre
www.telemecaniquesensors.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. As standards, specifications and design change from time to time, please ask for confirmation of the information given in this publication. Neither TMSS France nor any of its subsidiaries or other affiliated companies shall be responsible or liable for misuse of the information contained in this document.

Telemecanique™ Sensors is a trademark of Schneider Electric Industries SAS used under license by TMSS France. Any other brands or trademarks referred to in this document are property of TMSS France or, as the case may be, of its subsidiaries or other affiliated companies. All other brands are trademarks of their respective owners.

As standards, specifications and design change from time to time, please ask for confirmation of the information given in this publication