




Note:  
- Drawings Not To Scale  
- Drawings Subject to Change Without Notice  
- Dimensions are inches next to [Millimeters]

Part No.:

XS218AAMAL2

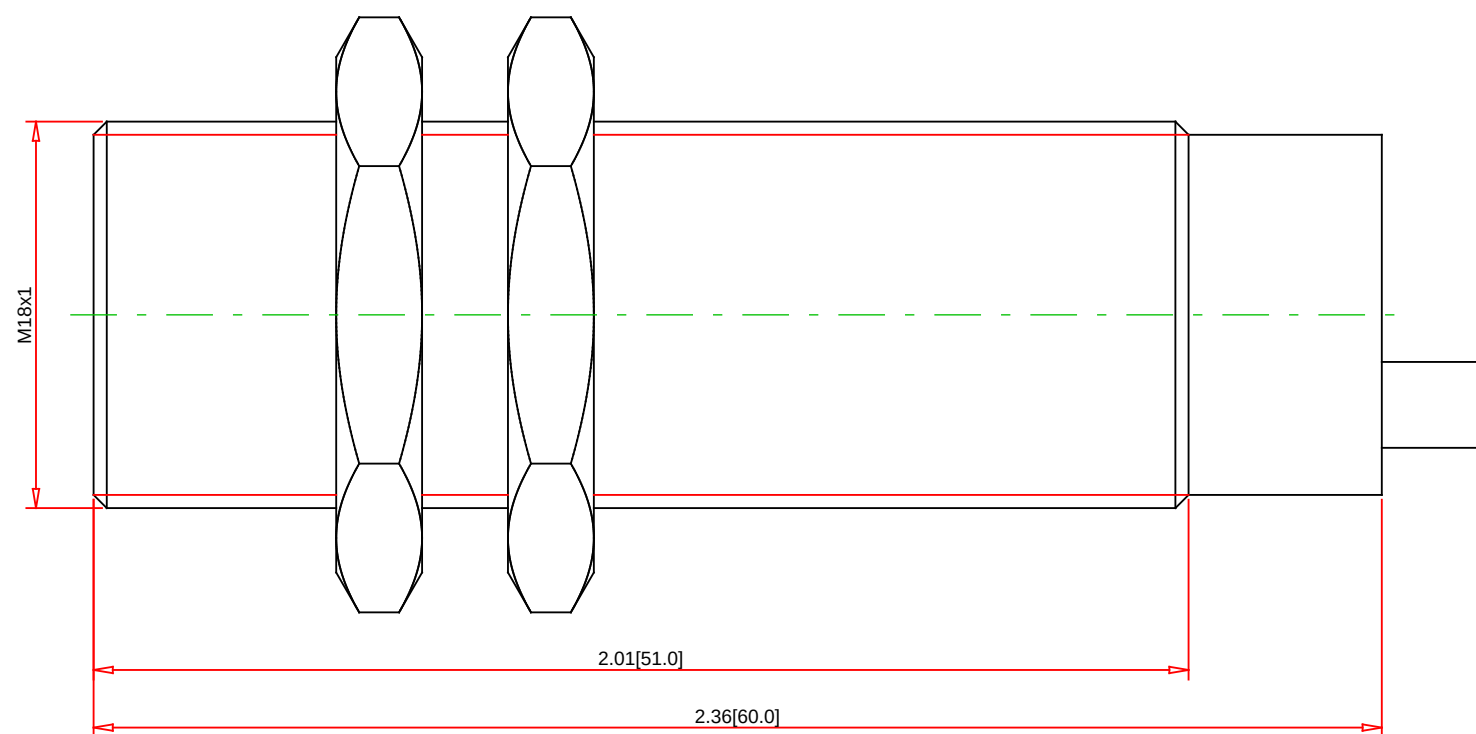

Telemecanique  
Sensors

Telemecanique Sensors  
1875 Founders Drive  
Dayton, OH 45420-4017  
Customer Care Center : 1-800-435-2121  
Web : [www.tesensors.com](http://www.tesensors.com)

Technical Information:

Detecting Distance: 12.0 mm (0.46 in)  
Circuit Type: 2 wire  
Output Mode: NO  
Volts Type: AC/DC  
Voltage Range: 24-240  
Max Load: AC:5-300 mA DC:5-200 mA  
Shielding: Non shielded  
Max Switching Frequency: 25 Hz AC / 1000 Hz DC  
Temp Range: -25° to 85° C (-13° to 185° F)  
NEMA Type: 4X (indoor use only)  
IP Rating: IP68, IP69K  
Standards: UL, CE Rohs

Specification:

Sensor Type: Inductive  
Description: Proximity Sensor, Inductive, 18 mm Barrel, 24-240, Non Shielded  
Body Style: Barrel  
Diameter: mm  
Housing Material: Plastic  
Cable Size: 2.0 m (6.6 ft)  
Connector Type:  
Special Features: