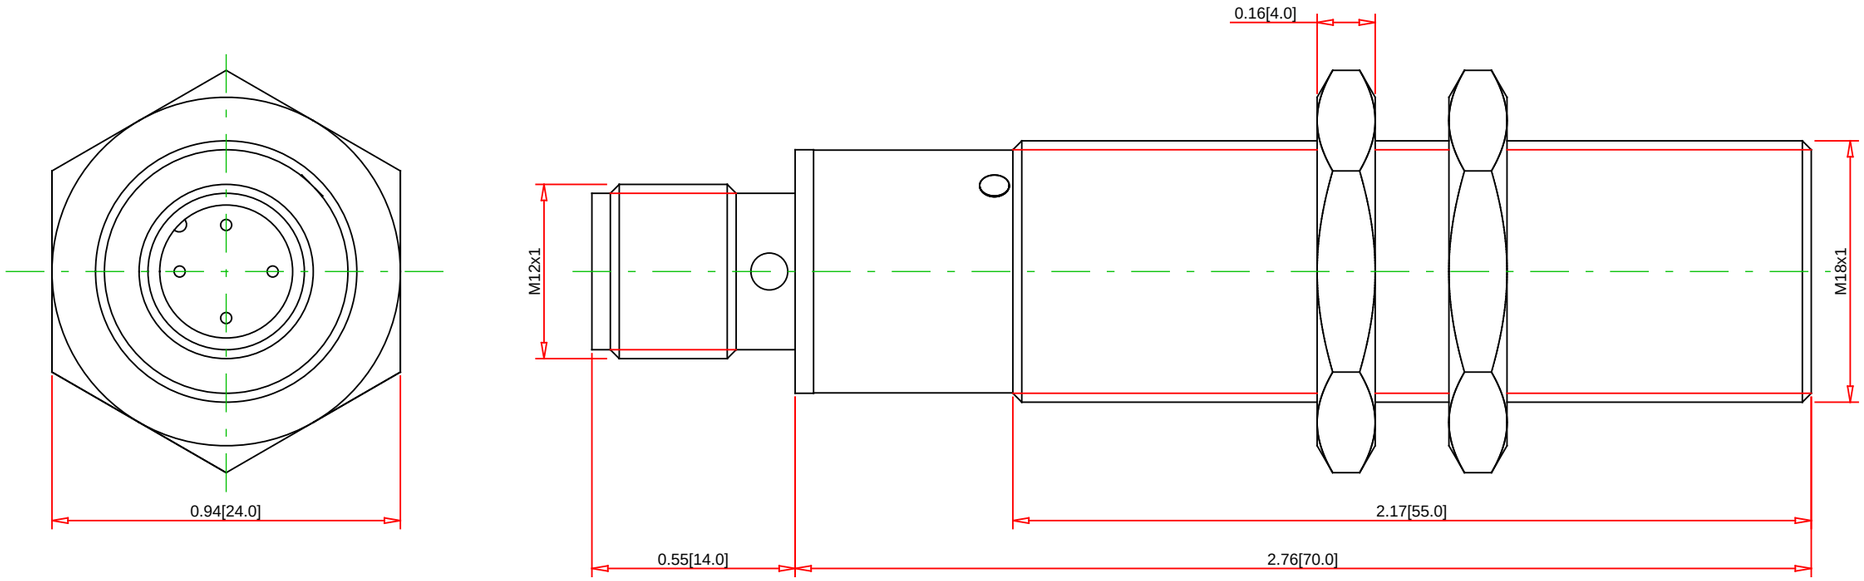


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XT118B1PCM12

Telemecanique Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Max Range Adj:	5.0 mm (0.197 in)
Circuit Type:	NO + NC
Output Mode:	PNP
Volts Type:	DC
Voltage Range:	12-30 VDC
Max Load :	200 mA
Shielded:	Shielded
Operating Frequency:	200 Hz
Temp Range:	-25° to 70° C (-13° to 158° F)
NEMA Type:	4X (indoor use only)
Standards:	UL, CE Rohs

Specification:

Sensor Type:	Capacitive Sensor
Description:	Proximity Sensor, Capacitive, 18 mm Barrel, 12-30 VDC, Shielded
Body Style:	Barrel
Diameter:	mm
Face Material:	PBT Plastic
Housing Material:	Nickel Plated Brass
Cable Length:	
Connector Type:	M12
Special Features:	NO + NC outputs