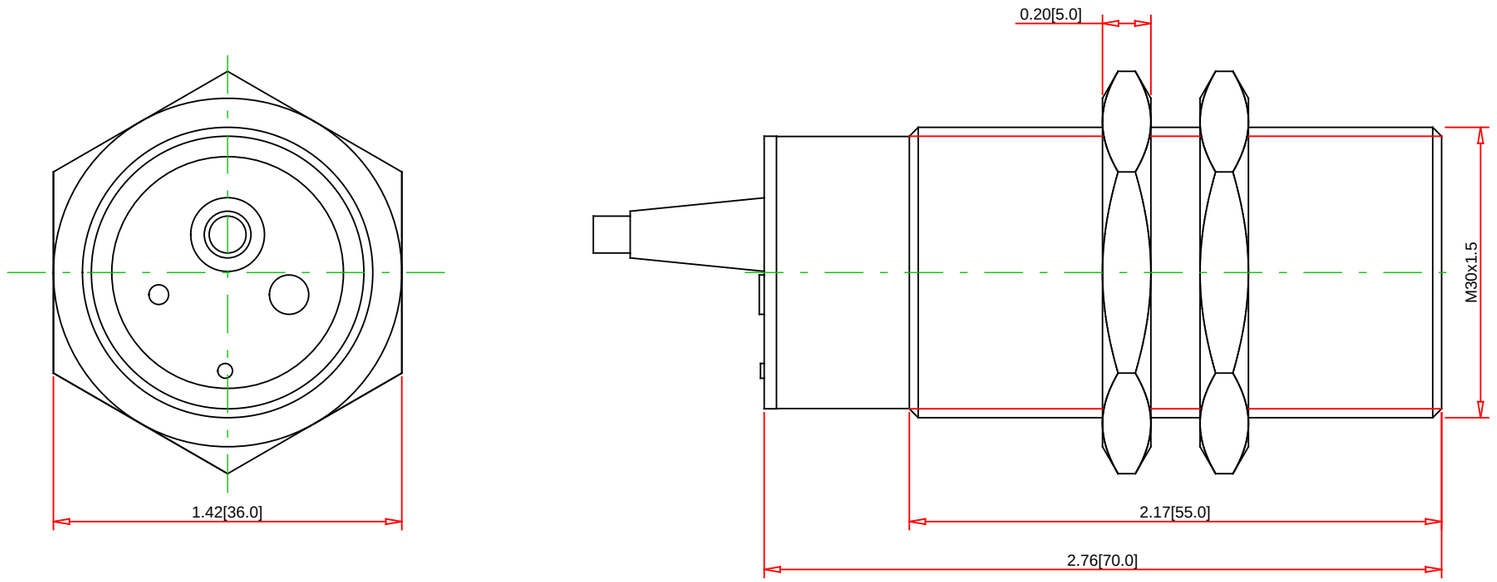



Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

# XT130B1PAL2

Telemecanique Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

## Technical Information:

| | |
|---|---|
| Max Range Adj: | 10.0 mm (0.394 in) |
| Circuit Type: | Normally Open |
| Output Mode: | PNP |
| Volts Type: | DC |
| Voltage Range: | 12-30 VDC |
| Max Load : | 200 mA |
| Shielded: | Shielded |
| Operating Frequency: | 150 Hz |
| Temp Range: | -25° to 70° C (-13° to 158° F) |
| NEMA Type: | 4X (indoor use only) |
| Standards: | UL, CE Rohs |

## Specification:

| | |
|---|---|
| Sensor Type: | Capacitive Sensor |
| Description: | Proximity Sensor, Capacitive, 30 mm Barrel, 12-30 VDC, Shielded |
| Body Style: | Barrel |
| Diameter: | mm |
| Face Material: | PBT Plastic |
| Housing Material: | Nickel Plated Brass |
| Cable Length: | 2.0 m (6.6 ft) |
| Connector Type: | |
| Special Features: | NO output |