
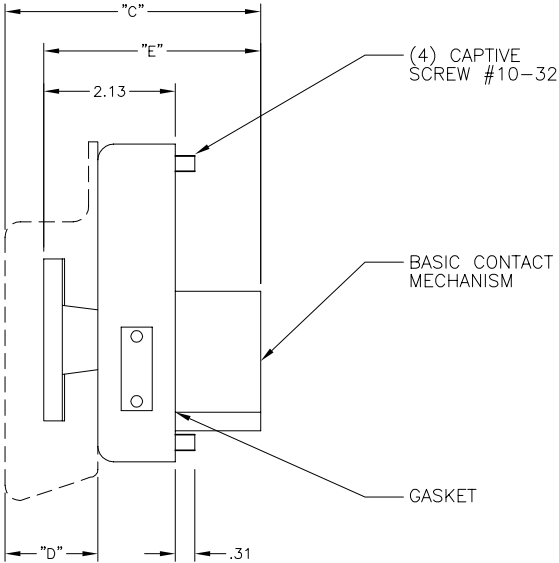


PALM OPERATED PUSH BUTTONS

DESCRIPTION	TYPE	RATINGS AC	RATINGS DC
BOX	PB	120 VOLTS	120 VOLTS
DEEP GUARD	PG1	240 VOLTS	240 VOLTS
SHALLOW GUARD	PG2	480 VOLTS	600 VOLTS
* IMPORTANT: WILL FIT ONLY CLASS 6610 SERIES A TESTERS AND CATALOG NUMBER 5008, SERIES B TESTERS. WILL NOT FIT 5008 PRE-SERIES B TESTERS. LEADS MUST BE REPLACED AS A UNIT. REPLACEMENT OF INDIVIDUAL LEAD COMPONENTS MUST NOT BE ATTEMPTED			

APPROXIMATE DIMENSIONS - INCHES					
TYPE	A	B	C	D	E
P1, P2, P3, P4, P5, P6					3.50
WITH DEEP GUARD, PG1	4.31	5.75	4.13	1.50	3.50
WITH SHALLOW GUARD, PG2	4.03	5.60	3.63	1.00	3.50

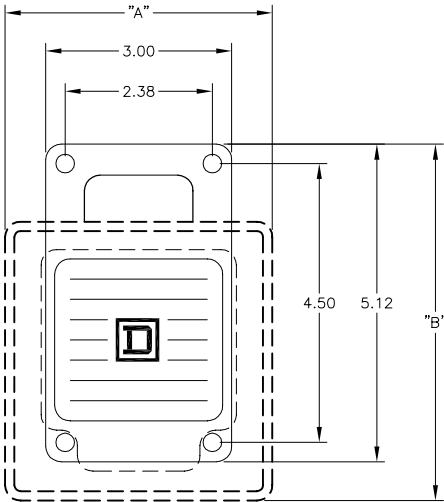

TYPE P

Catalog Number: -
Ratings: SEE CHART
UL File/CCN: E42259 NKCR
CSA File/Class: -
Meets Standards: -
Weight: -
Wire Size: 12-24 AWG
Terminal torque: 7 in. lbs
Mounting Hwd.: (4) #10-32 SCREWS

ELECTRICAL RATINGS-SINGLE POLE

AC-HEAVY DUTY-NEMA A600					DC-STANDARD DUTY-NEMA P600		
VOLTS	INDUCTIVE AND RESISTIVE			RESISTIVE 75% POWER FACTOR	VOLTS	INDUCTIVE AND RESISTIVE	
	MAKE AMPERES	BREAK AMPERES	CONTINUOUS CARRYING AMPERES	MAKE BREAK & CONTINUOUS AMPERES		MAKE AND BREAK AMPERES	CONTINUOUS CARRYING AMPERES
120	60	6	10	10	120	1.1	10
240	30	3	10	10	240	.55	10
480	15	1.5	10	10	600	.20	10
600	12	1.2	10	10			

"THE SQUARE D COMPANY HAS PROPRIETARY RIGHTS TO THE INFORMATION CONTAINED HEREON. THIS INFORMATION REMAINS THE PROPERTY OF SQUARE D COMPANY AND MAY BE USED ONLY IN CONFORMANCE WITH INSTRUCTIONS ISSUED BY SQUARE D COMPANY. USER SHOULD VERIFY DRAWINGS ARE TO THE LATEST/CURRENT REVISION PRIOR TO INCORPORATING IN A DESIGN FILE."

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

THIRD ANGLE PROJECTION
TOLERANCES
UNLESS OTHERWISE SPECIFIED
2 PLACE DECIMALS ± .01

PALM OPERATED PUSH BUTTONS
CLASS 9001

 **SQUARE D COMPANY**

DWG# 9001P1_PB_PG1_PG2_OUTLINE_001
NO.